

FIREBOXES CATALOGUE



cast iron fireboxes
steel fireboxes

CONTENTS

■ Cast iron fireboxes

| | |
|-----------------------------------|-------|
| Why choose seguin | 4 |
| FIREBOXES«New Generation» | 5 |
| Rubis | 9 |
| Celsius | 10 |
| Sunflam | 11 |
| Spitflam - Kitflam | 12 |
| Europa 7 | 13 |
| Europa 7 Evolution | 14 |
| Europa 7 Evo Plus | 15 |
| Europa 7 Evolution VL | 16 |
| Visio 8 | 17 |
| Visio 8 Plus | 18 |
| Pano 7 | 19 |
| Pano 7 Evolution | 20 |
| Pano 7 Evo Plus | 21 |
| Super 8 | 22 |
| Super 9 | 23 |
| Multivision 7000 | 24 |
| Multivision 8000 | 25 |
| Panoramic | 26 |
| Multivision 7000/8000 Hydro | 27-29 |
| Hexa 7 | 30 |
| Hexa 8 | 31 |
| Insert 3000 | 32 |
| Intégral | 33 |
| Back Fire | 34-36 |
| Multichauf | 37 |

■ steel fireboxes

| | |
|-----------------------------------|----|
| Horizon 71 & 80 cm | 39 |
| Horizon 100 cm | 40 |
| Horizon 80 cm curved door | 41 |
| Meteor flat door | 42 |
| The post combustion | 44 |
| Outside air intake | 45 |
| Reliable ecological heating | 46 |

| | |
|--|-------|
| Technical features | 47 |
| Insert I700 | 48 |
| F800H | 49 |
| F800I | 49 |
| F1000 | 50 |
| F1000H | 50 |
| F1200 | 51 |
| F1200H | 51 |
| F1400 | 52 |
| F1400H | 52 |
| F1600 | 53 |
| F1600H | 53 |
| F1600XXL | 54 |
| VLG900 | 55 |
| VLD900 | 55 |
| F1200HVLG | 56 |
| F1200 HVLD | 56 |
| F3V900 | 57 |
| F1200H3V | 57 |
| DF1000 | 58 |
| DF1000H | 58 |
| DF1200H | 59 |
| DF1600H | 59 |
| DF1600XXL | 60 |
| Epi 950 | 60 |
| R180 | 61 |
| F800B | 61 |
| Z800I | 62 |
| Z800B | 62 |
| B900 | 63 |
| B1100 | 63 |
| P900 | 64 |
| P1100 | 64 |
| Metallic frames XL - embedded frames | 65 |
| Metallic frames | 66-67 |



Why Choose **Seguin** ?

For the quality of cast iron. To reach the highest quality level, our foundries respect our own detailed specifications. All our fireboxes are produced with pure cast iron only.

For the technical assets. The valve system in the smoke flue allows to reach high efficiency levels from 72 to 77,40%. It is adjustable in width to guarantee optimal functioning, whatever the type of smoke flues.

The valve control system prevents the door from being opened when the valve is closed, so as to avoid smoke spillage into the room.

For the reliability. The control systems are assembled with safety nuts, preventing risks of locking or loosening. The lift-doors are equipped with chains and lubricated gears, ensuring a good alignment and a silent operation.

For the comfort. Seguin fireboxes are equipped with an air wash system on the four sides of the glasses, reducing cleaning constraints.

For the double combustion and the air distribution systems. More efficient, fuel (wood) savings, reduction of emissions for the great comfort of users and the respect of the environment.

For the guarantee. All Seguin fireboxes are guaranteed for 10 years. (except the Insert 3000 , the Integral : 5 years)



GARANTIE
10 ans*

*voir conditions dans la notice de l'appareil

FIREBOXES

"New Generation"

Screen-printed glass **BLACK**
line



The "**BLACK LINE**" Ventilation of the glass

- EUROPA 7 EVOLUTION (front – corner – 3 glass sides) - SUPER 9 - VISIO 8 - MULTIVISION 7000 - PANO 7 EVOLUTION



FIREBOXES

"New Generation"

The double combustion

Double air flow system - DAFS (exclusive patented system)

DAFS

| | |
|-------------------|-------------------|
| EMISSIONS | < 35 mg |
| Efficiency | 75/77%* |
| CO | < 0,12% |

*(depending on the model)

- Improved performance
- Superior efficiency
- Environmental friendliness
- Cleaner glasses



Combustion

Basically, the combustion requires several steps:

- Primary phase: corresponds to the ignition, and resulting in a first release of heat + smokes + various gases.
- Secondary phase: additional oxygen is supplied into the combustion chamber through the glass and this result in the ignition of those gases which release extra energy.

This principle is effective on the whole Seguin fireboxes range.

Secondary combustion


ENERGY SAVINGS AND ECOLOGY

The patented DAFS system is even more effective because the oxygen is supplied through air jets strategically positioned at the back of the combustion chamber.

CLEANER GLASS

The visual comfort is superior:

- The quality of combustion is better (less residues and smokes).
- The air flow makes the flames attracted at the back of the firebox.

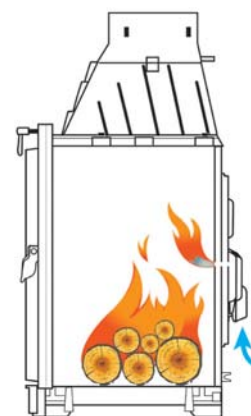

recommended use

EVO Plus Fireboxes

NEW GENERATION OF HIGHER PERFORMANCE

The combustion chamber called EVO PLU doubled with refractory bricks of high density, refocus the heat at the heart of the firebox. Combined with the DAFS system, the combustion of unburned residues is optimal: **even more efficient and energy savings (ex : 77% efficiency and 0,06 CO emission on the 70 EVO PLUS)**.

OUTSIDE AIR CONNECTION WITH AIR SUPPLY DISTRIBUTION DEVICE Available on double combustion only (option)



Control handle



Outside Air Distribution adapter ref A0211


Why sealed fireboxes ?

There can be no fires without oxygen. Solid fuel burning appliances (fireboxes, stoves..) are operated by an outside air intake, supplying oxygen for the combustion process and avoiding reduced pressure in the house.

More and more houses must meet rigorous standards as regards insulation, energy-savings..

Among the important criteria, a limit of air permeability or airtightness of the house is required.

In order to meet the new requirements, we offer the opportunity of not using the ambient air of the room for the combustion process on a large range of Seguin fireboxes. The air is directly supplied from the outside, through a duct connected to the outside. The appliance is operating independently

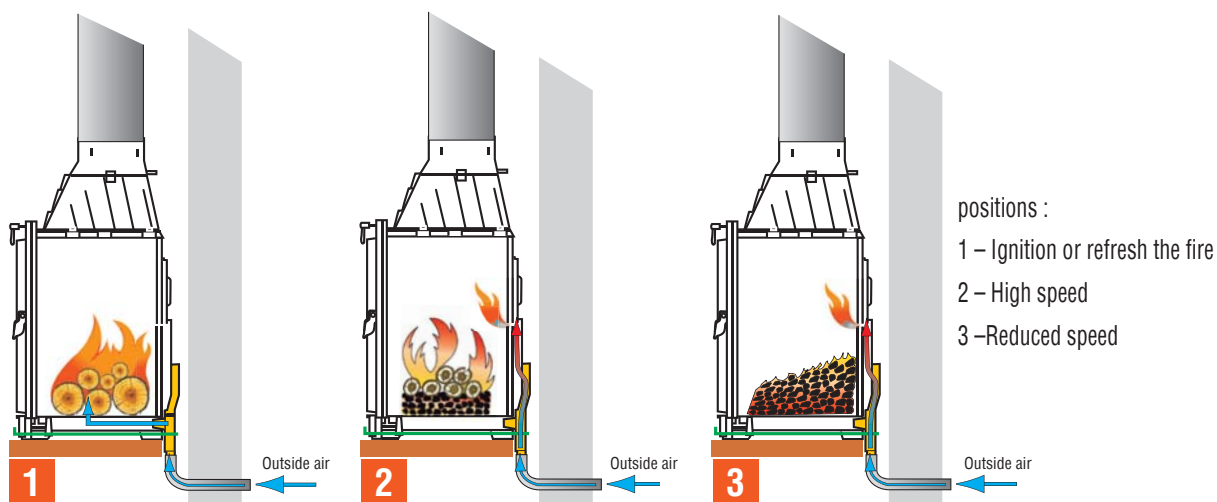



Cast iron fireboxes



Rubis

code : F0100

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed




Options :

- Brass or stainless steel decoration around the door


| | |
|---------------------------------------|--------------------|
| Facade | 59 cm |
| Logs | 45 cm |
| Nominal output | 7-10 kW* |
| Efficiency | 73,40%* |
| CO emission (% à 13% O ₂) | 0,28% |
| Heating volume (as an indication) | 350 m ³ |
| Weight | 105 kg |

* according to EN 13229 norm

Exit Ø 180

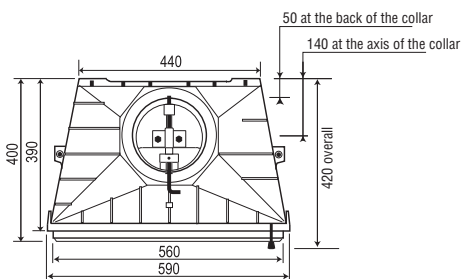

Decoration grid

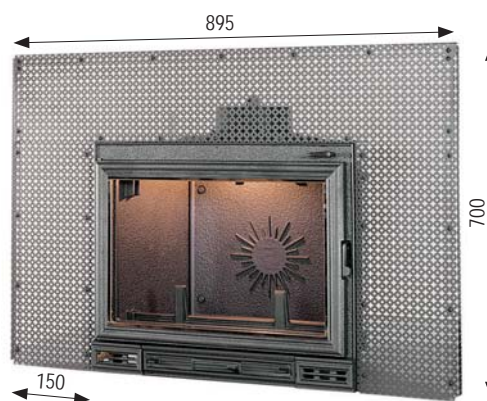

Cast iron fireboxes

10 years
guarantee*

*under the conditions stated on the instruction manual delivered with each appliance

Celsius

code : F0200



- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed


Options :

- Convector
- Brass or stainless steel decoration around the door

| | |
|-----------------------------------|--------------------|
| Facade | 71 cm |
| Logs | 55 cm |
| Nominal output | 8-12 kW* |
| Efficiency | 73,20%* |
| CO emission (% à 13% O2) | 0,25% |
| Heating volume (as an indication) | 420 m ³ |
| Weight | 140 kg |

*according to EN 13229 norm

Exit Ø 200

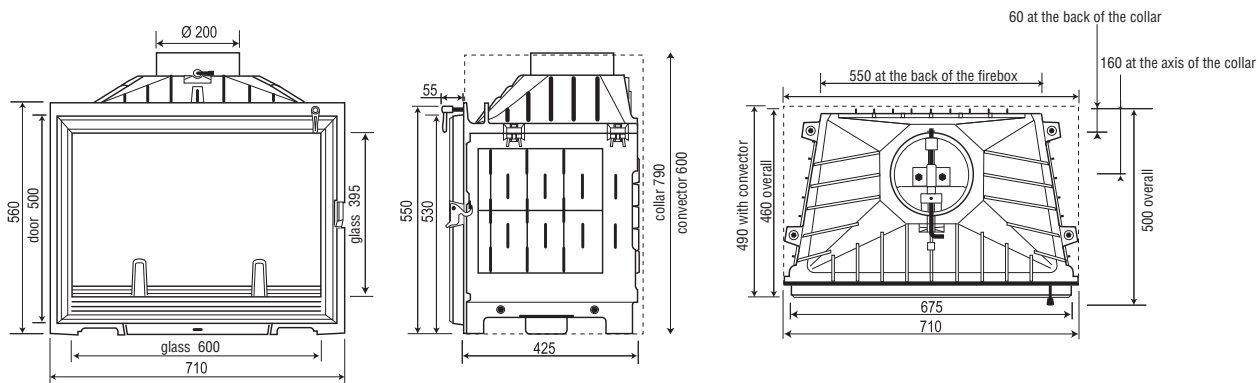

Convector

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Sunflam

code : F0300

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Decoration for Facade 80 cm
- Adapter for double combustion connection Ref : A0210



| Nominal output | 9-12 kW* |
|-----------------------------------|--------------------|
| Facade | 71 ou 80 cm |
| Logs | up to 55 cm |
| Heating volume (as an indication) | 420 m ³ |
| Weight | 155 kg |


*according to EN 13229 norm

WITH DAFS

| | |
|-------------------------------|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O2) DAFS | 0,11% |

WITHOUT DAFS

| | |
|--------------------------|---------|
| Efficiency | 73,20%* |
| CO emission (% à 13% O2) | 0,25% |

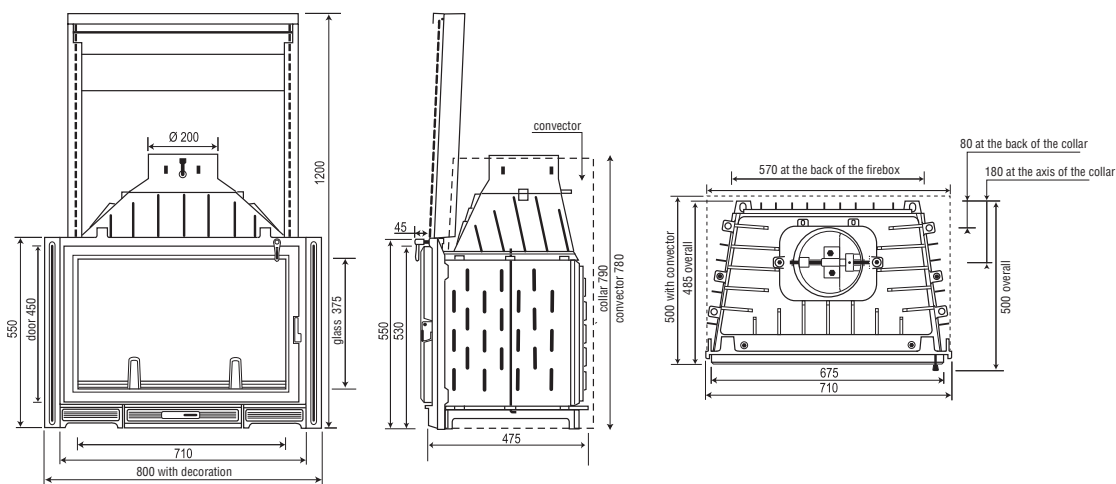

Facade 80 cm



Convector



Retractable door

10 years
guarantee*

*under the conditions stated on the instruction manual delivered with each appliance

Spitflam

code: F1611

EXIT Ø 200

The Spitflam is completely manufactured in cast iron, allowing a better efficiency level. With a perfect finishing aspect, the Spitflam is equipped with a screen-printed glass, an integrated handle and a decorative plate which can be easily dismantled (unique model). The valve control system prevents the door opening when the valve is closed, this system avoids smoke spillage. Clear out the ashes is simple thanks to the ash drawer. The glass is resistant to high temperature up to 760°. The Spitflam is delivered with a flame-breaker baffle. This firebox functions with wood only. It complies with EN 13229 norm.



Ash drawer with an air slide



| | |
|----------------|---------|
| Facade | 65 cm |
| Logs up to | 50 cm |
| Nominal output | 7-10 kW |
| Efficiency | 73,40% |
| Co Rate | 0,28% |
| Weight | 116 kg |


The efficiency performances (>70%) and the rate of CO emission (<0.3%) rank the Spitflam in class 1 of the European norm 13229)



Flame-breaker baffle
Limits the flames rising in the flue and allows a better diffusion of the heat in the flue.



Incorporated door handle.

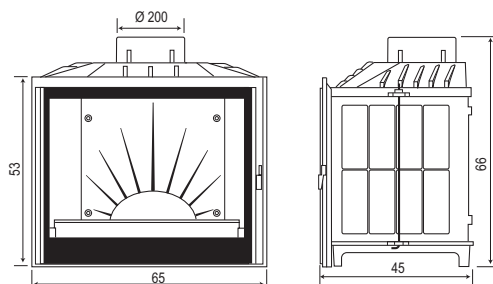


Flue collar valve with adjustable sealing
Optimization of the depression inside the firebox

Kitflam

code: F1400

EXIT Ø 200

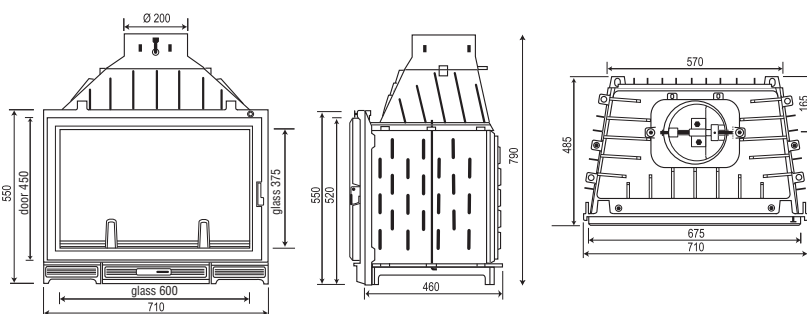

THIS FIREBOX IS AVAILABLE WITH THE DOUBLE COMBUSTION OPTION **DAFS**

| | |
|--------------------------|---------|
| Facade | 71 cm |
| Logs up to | 55 cm |
| Nominal output | 12 kW* |
| Efficiency | 73,20%* |
| Double combustion (DAFS) | 14 kW* |
| Efficiency (DAFS) | 77,00%* |
| Weight | 150 kg |

*(according to EN 13229 norm)

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Europa 7

code: F0400

EXIT Ø 200

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.


Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Brass or nickel finishing on cast iron door
- Seguin Déco door (stainless steel finishing)
- Decoration for facade 80 cm
- Double combustion

THIS FIREBOX IS AVAILABLE WITH THE DOUBLE COMBUSTION OPTION **DAFS**

| | |
|----------------------------|------------------------|
| Facade | 71 or 80 cm |
| Logs : up to | 55 cm |
| Nominal output : | 9-13 kW* |
| Efficiency : | 73,20%* |
| Double combustion (DAFS) : | 10,5-15 kW* |
| Efficiency (DAFS) : | 76,70%* |
| Weight : | 150 kg (basic version) |

* (according to EN 13229 norm)

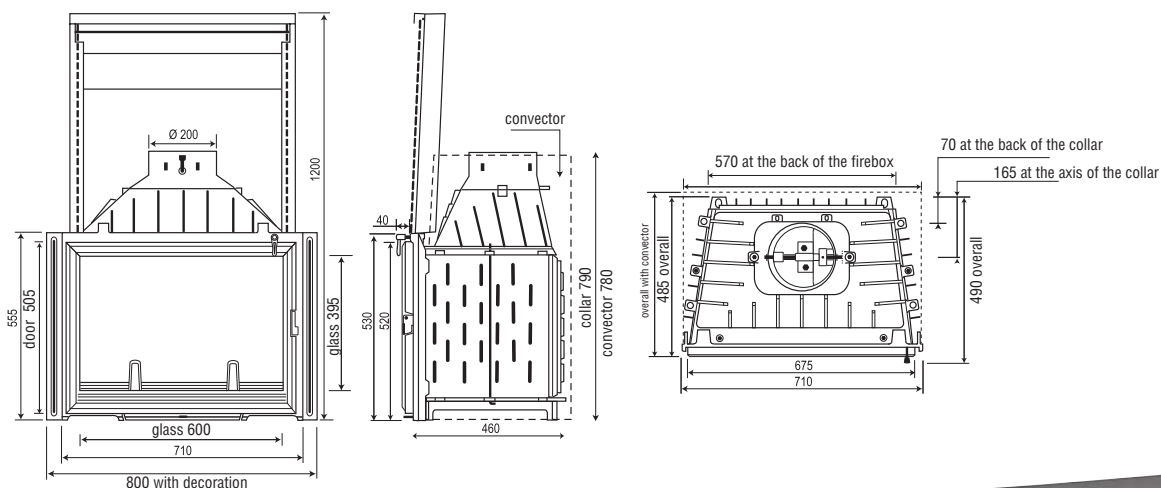

Available from 1 to 3 glass sides

Retractable door



3 glass sides



Right or left side



3 glass sides Black Line



10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

BLACK
line

Europa 7 Evolution

code : F0400E

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- cast iron door or black line door
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



| | |
|-----------------------------------|----------------------|
| Nominal output | 9-13 kW* |
| Facade | 71 cm |
| Logs | up to 55 cm |
| Heating volume (as an indication) | 455 m ³ |
| Weight | 155 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 73,20%* |
| CO emission (% à 13% O ₂) | 0,23% |

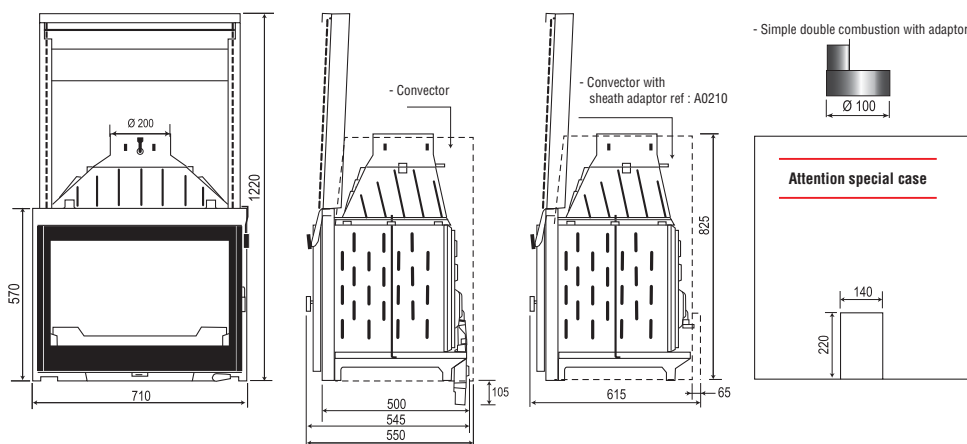

Left or right side glasses



3 glass sides - cast iron door



Model with cast iron door and convector (delivered with 2 caps and 2 sleeves Ø 125)

10 years
guarantee*

*under the conditions stated in the instruction manual delivered with each appliance

BLACK
line

Europa 7 EVO PLUS

code : F0400EP

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- cast iron door or black line door
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



Approved with 2 levels of output

DAFS SYSTEM


| | |
|--------------------------|---------------|
| Facade | 70 cm |
| Logs | up to 45 cm |
| Nominal output | 11 kW* |
| Efficiency | 77,40%* |
| CO emission (% à 13% O2) | 0,061% |
| Weight | 205 kg |

*according to EN 13229 norm

DAFS SYSTEM

| | |
|--------------------------|----------------|
| Facade | 70 cm |
| Logs | up to 45 cm |
| Nominal output | 5,5 kW* |
| Efficiency | 76,50%* |
| CO emission (% à 13% O2) | 0,154% |
| Weight | 205 kg |

*according to EN 13229 norm

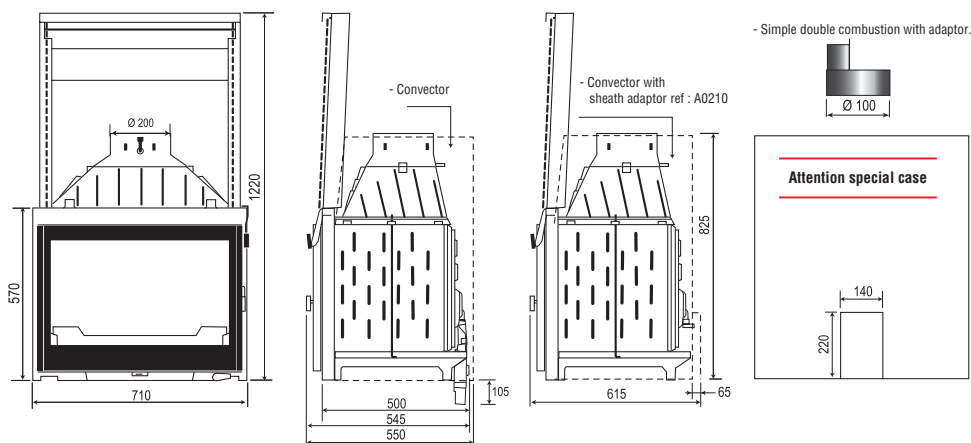

10 years
guarantee*

*under the conditions set in the instruction manual delivered with each appliance

BLACK
line

Europa 7 Evolution VL

code : F0401EVL (right glass) - F0402EVL (left glass)

Exit Ø 200

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



| Nominal output | 9-13 kW* |
|-----------------------------------|----------------------|
| Facade | 71 cm |
| Logs | up to 55 cm |
| Heating volume (as an indication) | 455 m ³ |
| Weight | 155 kg basic version |


*according to EN 13229 norm

WITH DAFS


| | |
|--|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS


| | |
|---------------------------------------|---------|
| Efficiency | 73,20%* |
| CO emission (% à 13% O ₂) | 0,23% |

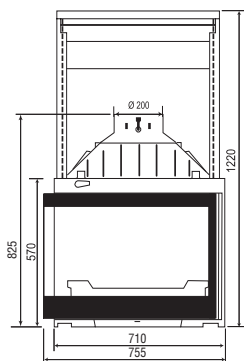


RETRACTABLE DOOR VERSION

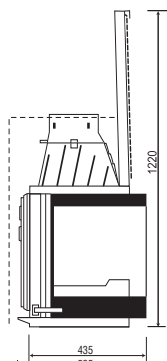

RETRACTABLE DOOR VERSION



SWING DOOR VERSION



DOOR OPENING



Retractable door



Retractable door and convector

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Visio 8

code : F1800

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



| | |
|-----------------------------------|----------------------|
| Nominal output | 11-15 kW* |
| Facade | 80 cm |
| Logs | up to 65 cm |
| Heating volume (as an indication) | 525 m ³ |
| Weight | 169 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|-------|
| Efficiency DAFS | 75%* |
| CO emission (% à 13% O ₂) DAFS | 0,09% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 76,50%* |
| CO emission (% à 13% O ₂) | 0,18% |

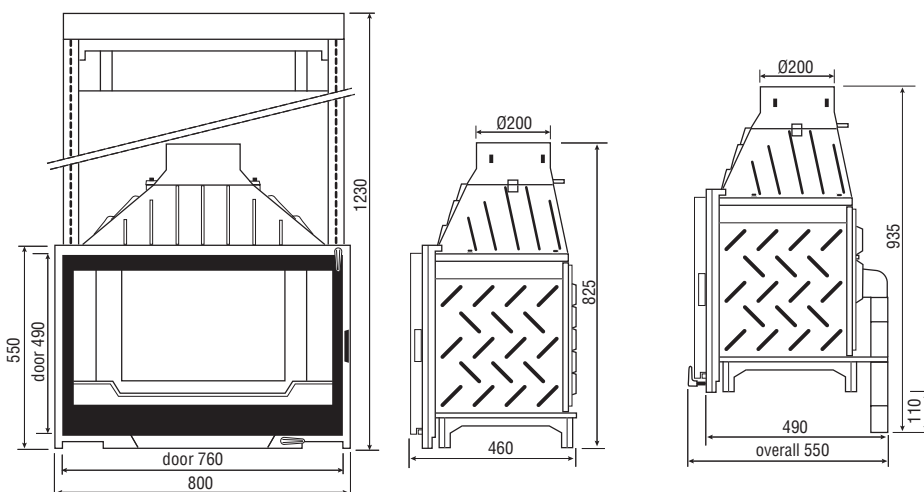

Retractable door and Convector

BLACK
line

10 years
guarantee*

*under the conditions set out in the instructions
must be delivered with each appliance

Visio 8 PLUS

code : F1800P



- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :


- Retractable door
- Convector
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



DAFS SYSTEM

| | |
|--------------------------|-------------|
| Facade | 80 cm |
| Logs | up to 55 cm |
| Nominal output | 11 kW* |
| Efficiency | 77,80%* |
| CO emission (% à 13% O2) | 0,11% |
| Weight | 220 kg |

*according to EN 13229 norm

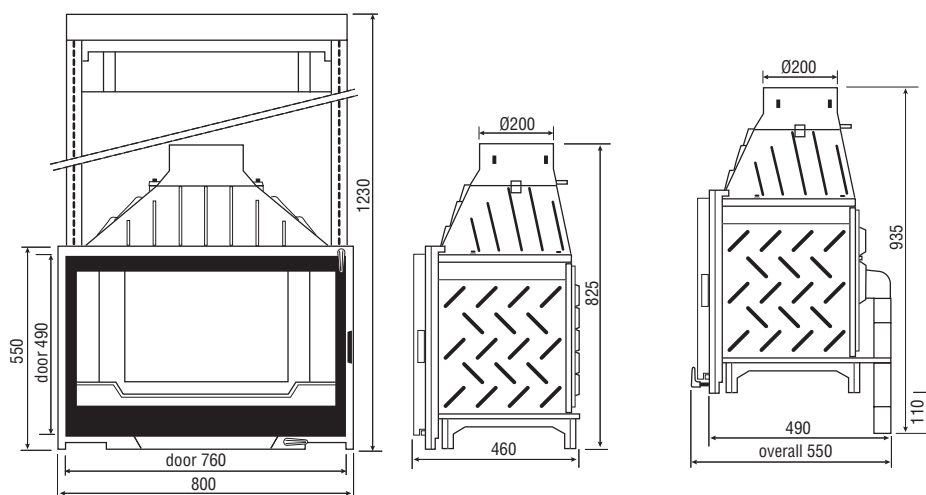

Pano 7

code: F1500E

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.


Options:

- Retractable door
- Convector
- Brass or nickel finishing on cast iron door
- Decoration for facade 80 cm
- Double combustion

| | |
|--------------------------|------------------------|
| Facade | 71 or 80 cm |
| Logs up to | 55 cm |
| Nominal output | 10-14 kW* |
| Efficiency | 73,10%* |
| Double combustion (DAFS) | 11-16 kW* |
| Efficiency (DAFS) | 76,50%* |
| Weight | 150 kg (basic version) |

*(according to EN 13229 norm)

EXIT Ø 200

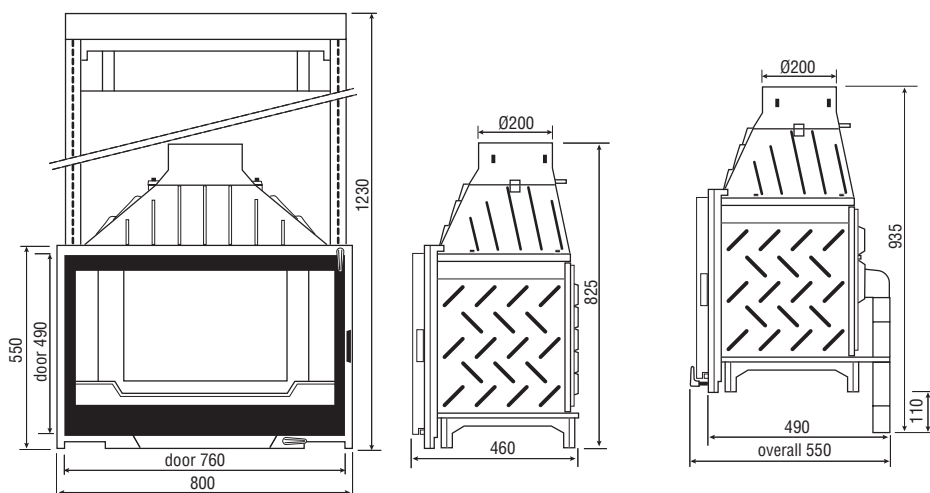

Convector



Retractable door

10 years
guarantee*

*under the conditions stated on the instruction manual delivered with each appliance

Pano 7 Evolution

code : F1500E

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



Screen-printed glass "Black line"

| Nominal output | 10-15 kW* |
|-----------------------------------|----------------------|
| Facade | 71 cm |
| Logs | jusqu'à 55 cm |
| Heating volume (as an indication) | 525 m ³ |
| Weight | 155 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 73,10%* |
| CO emission (% à 13% O ₂) | 0,21% |

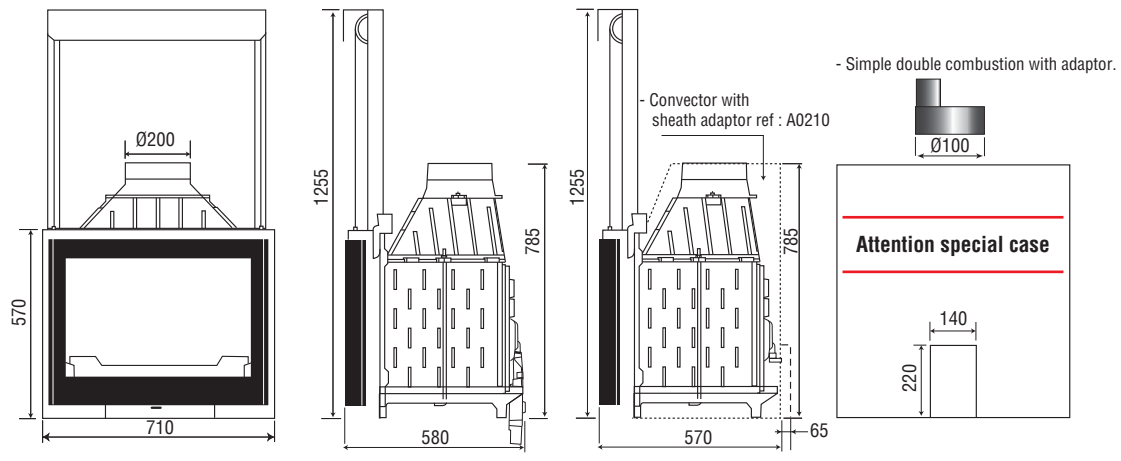

Convector



Retractable door



Pano 7 EVO PLUS

code : F1500EP

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Air distribution (with double combustion only)
- Adapter for double combustion connection Ref : A0210
- Adapter for air distribution connection Ref : A0211



Approved with 2 levels of output

SYSTEM DAFS


| | |
|--------------------------|---------------|
| Facade | 70 cm |
| Logs | up to 45 cm |
| Nominal output | 11 kW* |
| Efficiency | 77,40%* |
| CO emission (% à 13% O2) | 0,061% |
| Weight | 205 kg |

*according to EN 13229 norm

SYSTEM DAFS

| | |
|--------------------------|----------------|
| Facade | 70 cm |
| Logs | up to 45 cm |
| Nominal output | 5,5 kW* |
| Efficiency | 76,50%* |
| CO emission (% à 13% O2) | 0,154% |
| Weight | 205 kg |

*according to EN 13229 norm

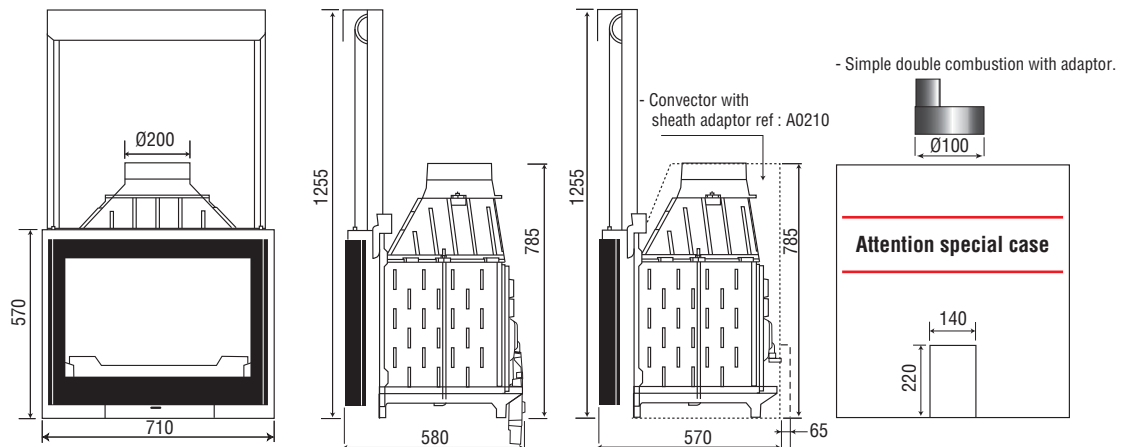

BLACK
line

GARANTIE
10 ans*

*voir conditions dans la notice de l'appareil

Super 8

code : F0600

PRESTIGE LINE

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Adapter for double combustion connection Ref : A0210



| | |
|-----------------------------------|----------------------|
| Nominal output | 10-16 kW* |
| Facade | 80 cm |
| Logs | up to 65 cm |
| Heating volume (as an indication) | 560 m ³ |
| Weight | 185 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|-------------------------------|--------|
| Efficiency DAFS | 74,6%* |
| CO emission (% à 13% O2) DAFS | 0,09% |

WITHOUT DAFS

| | |
|--------------------------|---------|
| Efficiency | 72,90%* |
| CO emission (% à 13% O2) | 0,18% |

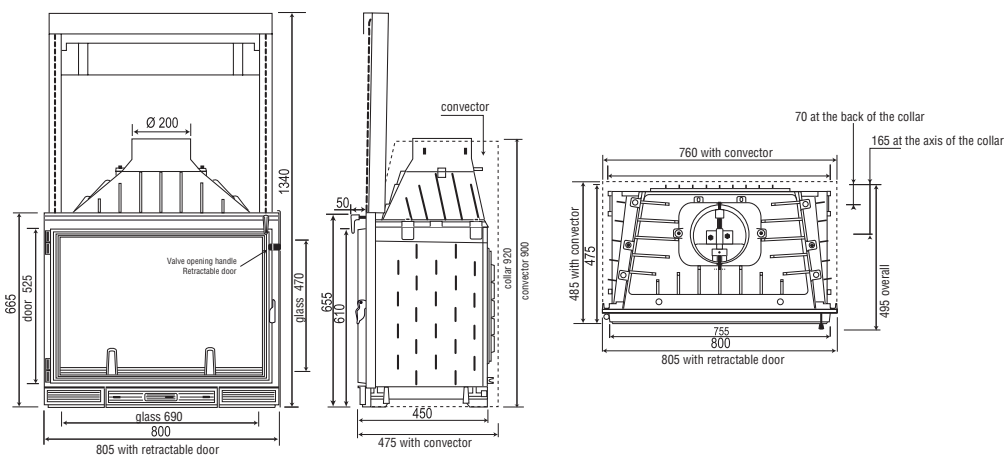

Convector



Retractable door

10 years
guarantee*

*under the conditions stated in the instruction manual delivered with each appliance

Super 9

code : F1300

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door :** the valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Adapter for double combustion connection Ref : A0210

Exit Ø 250



Black Line door option

| | |
|-----------------------------------|----------------------|
| Nominal output | 12-18 kW* |
| Facade | 91 cm |
| Logs | 80 cm |
| Heating volume (as an indication) | 630 m ³ |
| Weight | 230 kg basic version |

*according to EN 13229 norm

WITH DAFS



| | |
|-------------------------------|--------|
| Efficiency DAFS | 73,9%* |
| CO emission (% à 13% O2) DAFS | 0,08% |

WITHOUT DAFS

| | |
|--------------------------|---------|
| Efficiency | 70,80%* |
| CO emission (% à 13% O2) | 0,19% |



Swing door version

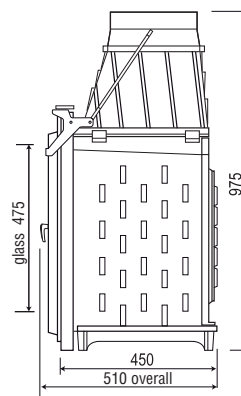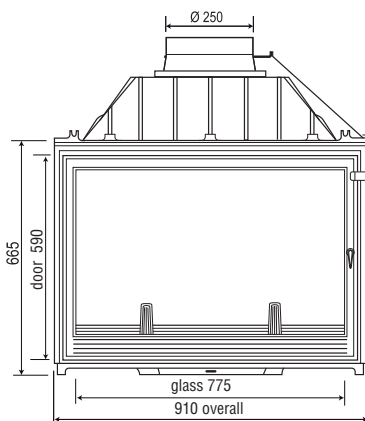

Convector



Retractable door

BLACK
line

10 years
guarantee*

*under the conditions noted on the retractable manual delivered with each appliance

Multivision 7000

code : F0700

PRESTIGE LINE

- **Flue collar valve:** with adjustable sealing
- **Swing and retractable door:** The valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Adapter for double combustion connection Ref : A0210



Black line door option

| | |
|-----------------------------------|----------------------|
| Nominal output | 10,5-15 kW* |
| Facade | 71 cm |
| Logs | 60 cm |
| Heating volume (as an indication) | 525 m ³ |
| Weight | 180 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 74,70%* |
| CO emission (% à 13% O ₂) | 0,27% |

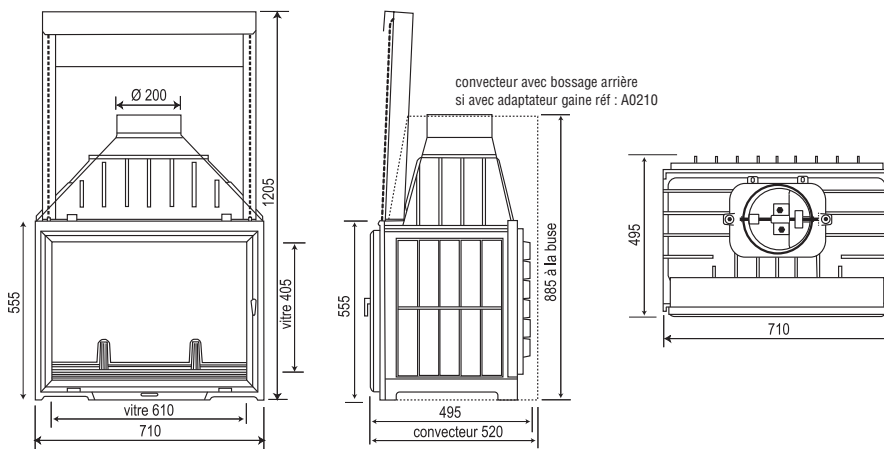

Retractable door and black line glass options

Available from 1 to 4 glass sides



BLACK
line

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Multivision 8000

code : F0800

Exit Ø 200 for simple face version
or Ø 250 for other versions only

- **Flue collar valve:** with adjustable sealing
- **Swing-door:** the door is blocked when the valve is closed
- **Retractable door:** the valve automatically opens at the opening of the door.


Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door



| | |
|-----------------------------------|----------------------|
| Facade | 80 cm |
| Logs | 70 cm |
| Nominal output | 11-16 kW* |
| Efficiency | 72,90%* |
| CO emission (% à 13% O2) | 0,18% |
| Heating volume (as an indication) | 590 m ³ |
| Weight | 230 kg basic version |

*according to EN 13229 norm

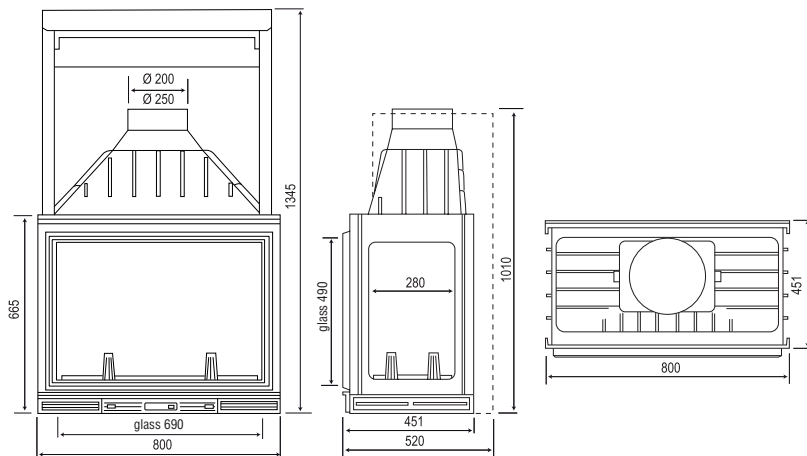

Available from 1 to 4 glass sides



Face



3 glass sides



4 glass sides



Right glass side



Retractable door and Convector

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Panoramic

code : F0900

LIGNE PRESTIGE

- **Flue collar valve:** with adjustable sealing
- **Swing and retractable door:** The valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Decoration for Facade 80 cm
- Adapter for double combustion connection Ref : A0210

Exit Ø 200



| | |
|-----------------------------------|----------------------|
| Nominal output | 10-15 kW* |
| Facade | 71 ou 80 cm |
| Logs | 60 cm |
| Heating volume (as an indication) | 525 m ³ |
| Weight | 200 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|---------|
| Efficiency DAFS | 75,30%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 74,70%* |
| CO emission (% à 13% O ₂) | 0,27% |

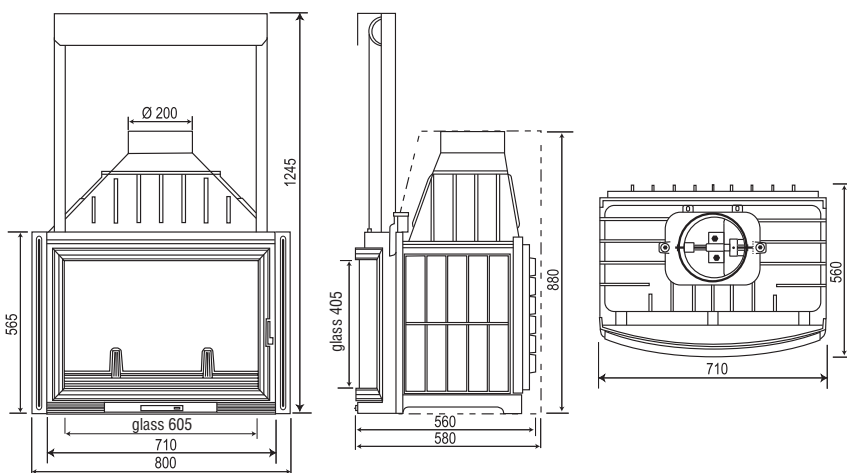

Facade 80 cm

Modulable de 1 à 4 faces vitrées



Retractable door and Convector



Double face



3 glass sides



4 glass sides



Right or left glass side

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Multivision 7000/8000



Firebox producing hot water for central heating
Cast iron firebox Multivision 7000 equipped with a steel water exchanger for central heating.
The water circuit is located inside the smoke chamber.
It is heated by the passage of combustion gases.
The cooling coil ensures the safety of the hot water circuit overheating.

- Only swing-door version
- Standard cast iron door
- Black line door as option
- Brass or stainless steel decoration around the door
- Double combustion as option
- Glass sides as option (not black line)
- Available in double face version
- Not available with convector





Multivision 7000



Multivision 8000

| | Multivision 7000 | Multivision 8000 |
|---------------------------------------|------------------|------------------|
| Facade | 71 cm | 80 cm |
| Logs | 60 cm | 70 cm |
| Nominal output | 19,6 kW* | 23,5 kW* |
| Thermal power | 12,40 kW | 14,3 kW |
| Efficiency | 72,90%* | 73%* |
| CO emission (% à 13% O ₂) | 0,30% | 0,11% |

*according to EN 13229 norm

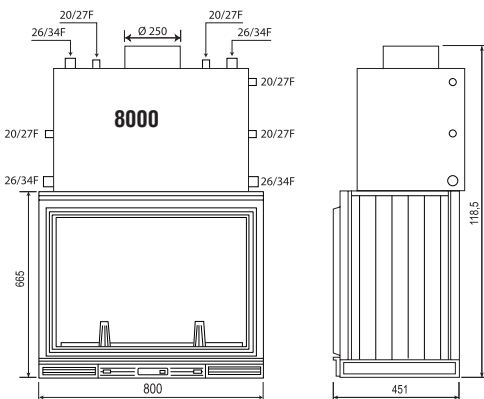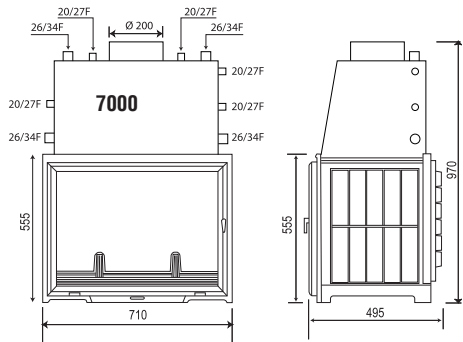

BLACK
line

steel guaranteed
3 years*
 system hydro

*under the conditions noted on the instruction manual


INSTALLATION INSTRUCTIONS OF MULTIVISION 7000 THERMO

The hydraulic circuit must be installed by plumbing and heating professionals. They are responsible for all connections.

VERY IMPORTANT

During the operation of the firebox, the circulator must function and the circuit must be filled with water.


DIAGRAM FOR THE INSTALLATION OF THE MULTIVISION 7000 / 8000 THERMO AS THE ONLY HEAT SOURCE OPEN EXPANSION TANK

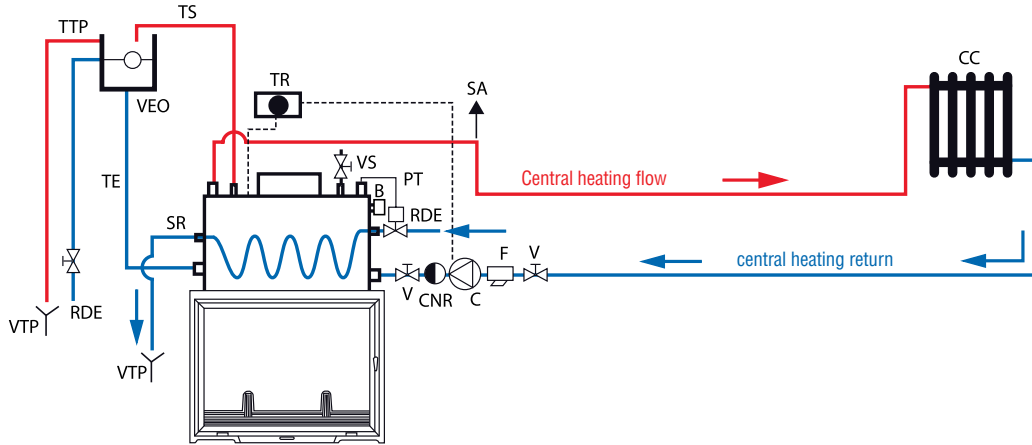

Recommendations

It is recommended that the circulating pumps C must be activated by a thermostat TR mounted on the water circuit when the heating water reaches 50°C. To ensure smooth operation of the system, an air separator SA should be installed. The thermal protective device PT allows the flow of water through the cooling coil when the temperature in the water circuit reaches 95°C, to avoid boiling water inside the circuit. The installation of the firebox and the hydraulic circuit must be carried out in compliance with the norms in force.


DIAGRAM FOR THE INSTALLATION OF THE MULTIVISION 7000/8000 THERMO COMBINED WITH A BOILER OPEN EXPANSION TANK

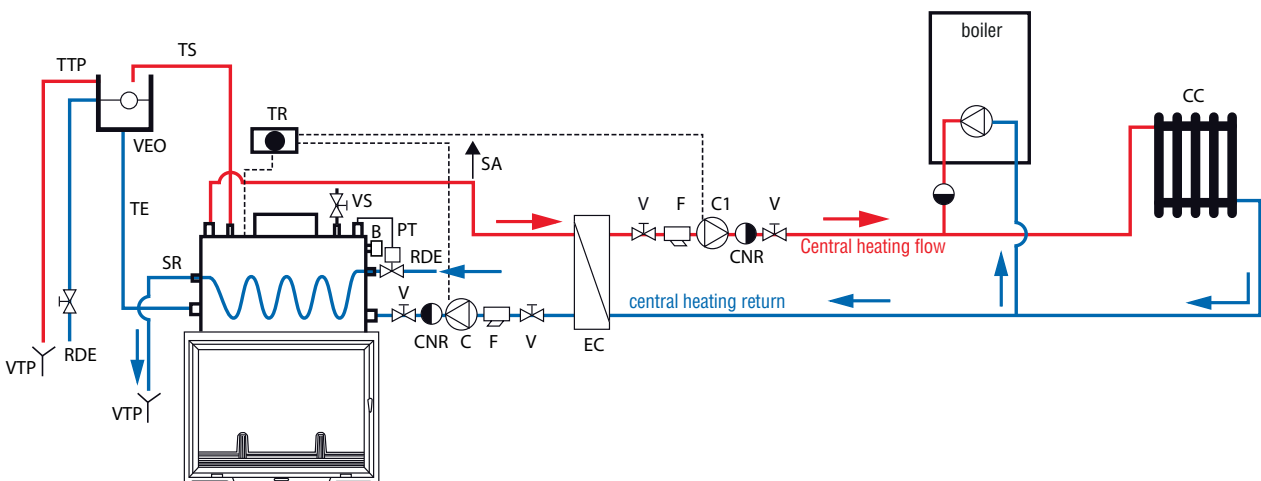

Recommendations

It is recommended that the circulating pumps C, C1 must be activated by a thermostat TR mounted on the water circuit when the heating water reaches 50°C. To ensure smooth operation of the system, an air separator SA should be installed. The thermal protective device PT allows the flow of water through the cooling coil when the temperature in the water circuit reaches 95°C, to avoid boiling water inside the circuit. The installation of the firebox and the hydraulic circuit must be carried out in compliance with the norms in force.


DIAGRAM FOR THE INSTALLATION OF THE MULTIVISION 7000/8000 THERMO AS THE ONLY HEAT SOURCE
CLOSED EXPANSION TANK

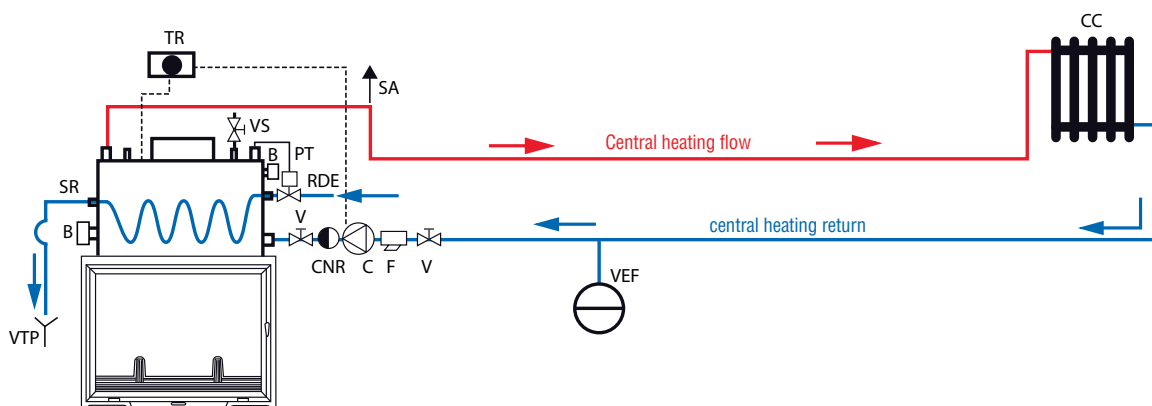

Recommendations

It is recommended that the circulating pumps C must be activated by a thermostat TR mounted on the water circuit when the heating water reaches 50°C. To ensure smooth operation of the system, an air separator SA should be installed. The thermal protective device PT allows the flow of water through the cooling coil when the temperature in the water circuit reaches 95°C, to avoid boiling water inside the circuit. The installation of the firebox and the hydraulic circuit must be carried out in compliance with the norms in force.

DIAGRAM FOR THE INSTALLATION OF THE MULTIVISION 7000/8000 THERMO COMBINED WITH A BOILER
CLOSED EXPANSION TANK

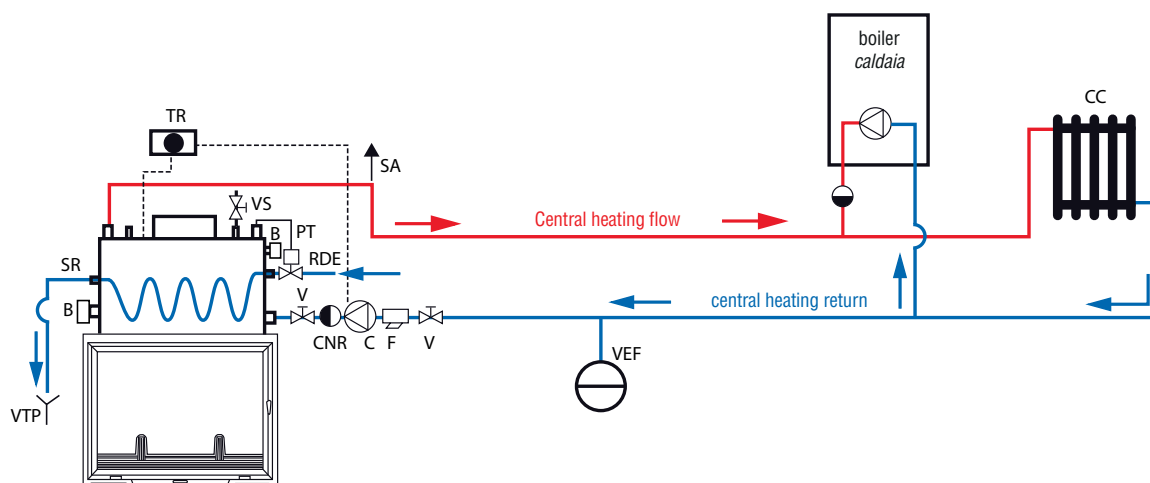

Recommendations

It is recommended that the circulating pumps C must be activated by a thermostat TR mounted on the water circuit when the heating water reaches 50°C. To ensure smooth operation of the system, an air separator SA should be installed. The thermal protective device PT allows the flow of water through the cooling coil when the temperature in the water circuit reaches 95°C, to avoid boiling water inside the circuit. The installation of the firebox and the hydraulic circuit must be carried out in compliance with the norms in force.

Legend:

C: circulating pump – C1: heating circulating pump – CC: heating circuit (radiators) – CNR: check valve – EC: heat exchanger – F: filter – PT: thermal protective device – RDE: water supply – SA: air separator (recommended) – SR: cooling coil – TE: expansion pipe – TR: thermostat – TS: safety pipe – TTP: overflow pipe – V: valve – VS: safety valve – VEF: open expansion tank – VTP: outflow funnel – B: cap

Important:

The Multivision 7000/8000 Thermo is a boiler with outstanding techniques for a perfect safety. The installation must be realized by plumbing and heating professionals. The manufacturer is not responsible in the event of disaster or thermal results not reached in the case of an installation not carried out in accordance with good professional practice.

During the operation of the firebox, the circulator must function and the circuit must be filled with water.

An access hatch is obligatory for any technical intervention.

Hexa 7

code : F1000

PRESTIGE LINE

- Flue collar valve with adjustable sealing
- **Swing and retractable door:** The valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Adapter for double combustion connection Ref : A0210

Exit Ø 200



| | |
|-----------------------------------|----------------------|
| Nominal output | 10-14 kW* |
| Facade | 71 cm |
| Logs | jusqu'à 55 cm |
| Heating volume (as an indication) | 490 m ³ |
| Weight | 170 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|--------|
| Efficiency DAFS | 75,3%* |
| CO emission (% à 13% O ₂) DAFS | 0,11% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 73,10%* |
| CO emission (% à 13% O ₂) | 0,21% |

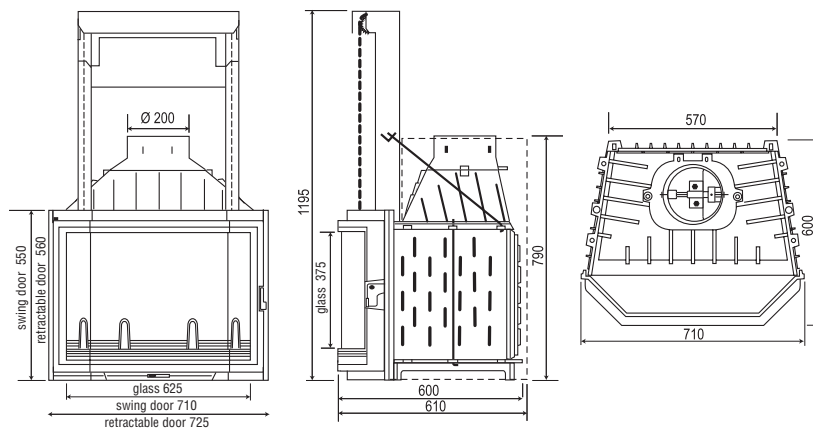

Retractable door



Convector

10 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance

Hexa 8

code : F1100

Exit Ø 200/250

- Flue collar valve with adjustable sealing
- **Swing and retractable door:** The valve automatically opens at the opening of the door.

Options :

- Retractable door
- Convector
- Brass or stainless steel decoration around the door
- Adapter for double combustion connection Ref : A0210



| | |
|-----------------------------------|----------------------|
| Nominal output | 11-16 kW* |
| Facade | 80 cm |
| Logs | 65 cm |
| Heating volume (as an indication) | 560 m ³ |
| Weight | 215 kg basic version |


*according to EN 13229 norm

WITH DAFS

| | |
|--|---------|
| Efficiency DAFS | 75,90%* |
| CO emission (% à 13% O ₂) DAFS | 0,23% |

WITHOUT DAFS

| | |
|---------------------------------------|---------|
| Efficiency | 72,90%* |
| CO emission (% à 13% O ₂) | 0,18% |

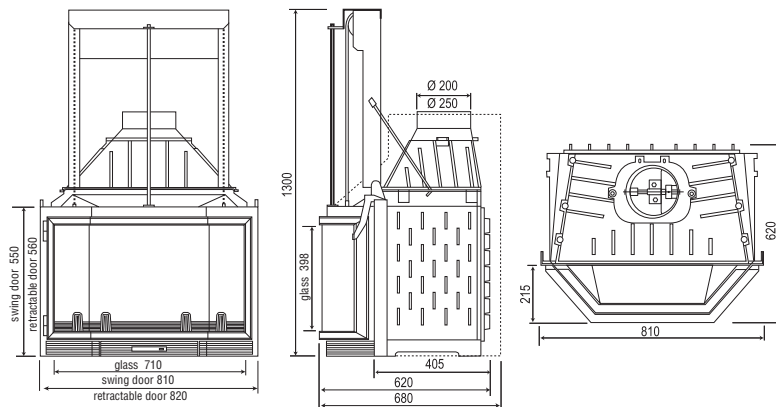

Retractable door



Convector

**10 years
guarantee***

*under the conditions stated in the instruction manual delivered with each appliance

Insert 3000

code : F0510

PRESTIGE LINE

- Flue collar valve with adjustable sealing
- Swing-door: the door is blocked when the valve is closed

Options :

- Steel Convector
- Ventilation kit
- Brass or stainless steel decoration around the door




| | |
|---------------------------------------|-------------------------|
| Facade | 60 cm |
| Logs | jusqu'à 50 cm |
| Nominal output | 7-10 kW* |
| Efficiency | 73,40%* |
| CO emission (% à 13% O ₂) | 0,28% |
| Heating volume (as an indication) | 350 m ³ |
| Weight | 230 kg basic version |
| | 111 kg with Convector |
| | 130 kg complete version |

*according to EN 13229 norm

Exit Ø 200



Firebox with steel convector and Ventilation kit

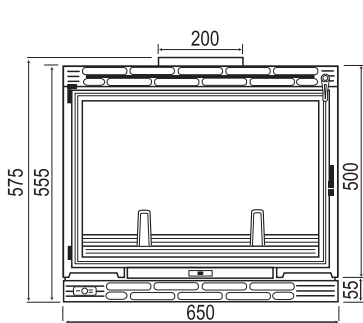

Firebox without option


Firebox Convector and ventilation kit



3 positions :

- Stop
- 1st speed : 60 m³/gh
- 2nd speed : 126 m³/h

Removable grid for ventilator repairs (220V - 50Hz)

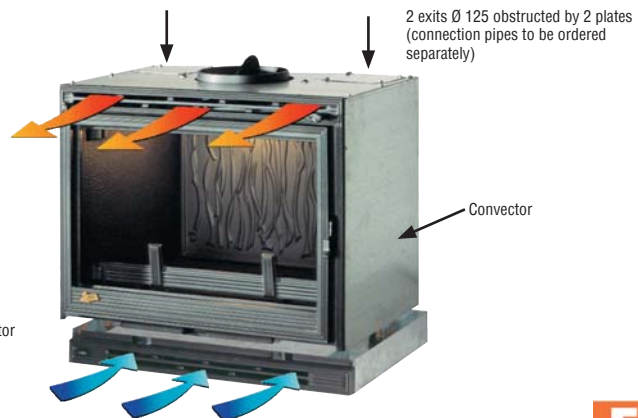

For security reasons, it is compulsory to insulate the under side of the beam if it is in combustible materials. Do not stop the ventilator during the operation of the firebox.

5 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance



Integral

code : FINTSF



- Outside air intake for combustive air Ø 80 mm
- Lacquered plate - RAL-color of your choice

| | |
|--------------------------|--------|
| Logs | 50 cm |
| Nominal output | 11 kW* |
| Efficiency | 77,9%* |
| CO emission (% à 13% O2) | 0,12% |
| Weight | 152 kg |

*according to EN 13229 norm

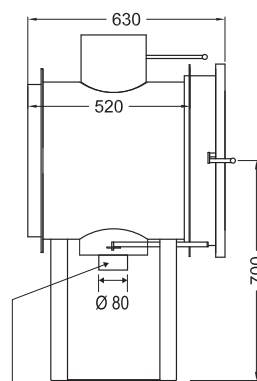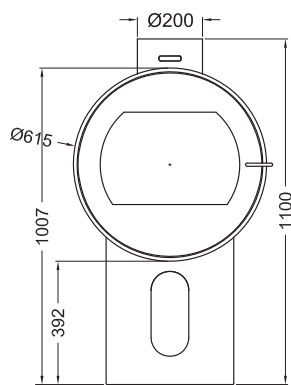

Outside air connection

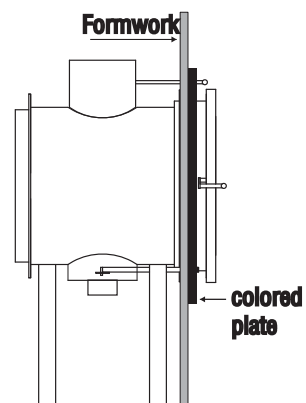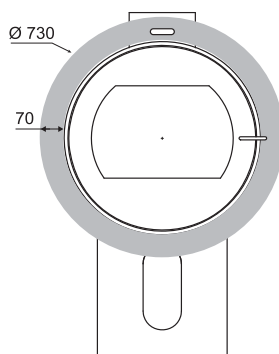

5 years
guarantee*

*under the conditions noted on the instruction manual delivered with each appliance


BackFIRE



Keep the real pleasure of a fire in a traditional fireplace, and benefit from the advantages of a closed hearth:


- safety
- heat performances
- high efficiency (more than 75%)
- energy-savings

Functioning as traditional open fireplace mode

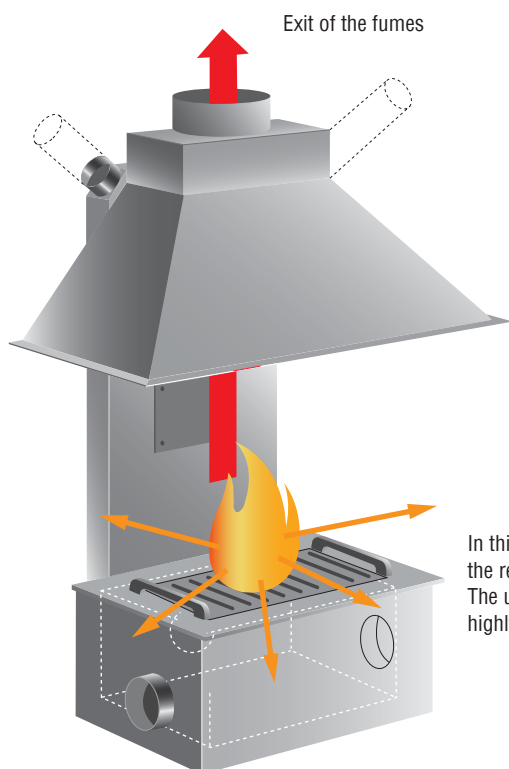

In this case, you will enjoy the real pleasure of a fire. The use of a fireguard is highly recommended.



Closed fireplace mode

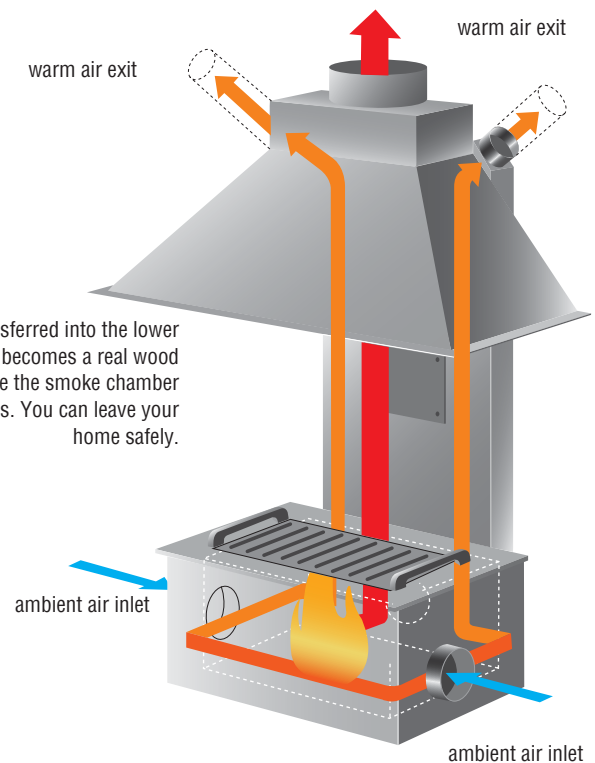

Once the fire is transferred into the lower part, the BackFire becomes a real wood stove. The valve inside the smoke chamber prevents heat losses. You can leave your home safely.

Use

- 1 The BackFire is on mode "open-fireplace"
- 2 Pull the hatch to your direction, tip off the logs and the embers inside the firebox in the lower part.
- 3 Close the plate and the valve of the smoke chamber. The fumes leave from the flue at the back.
This system prevents heat losses in the flue.
- 4 To load wood:
 - Pull the hatch
 - Tip off the hatch
 - Feed with wood

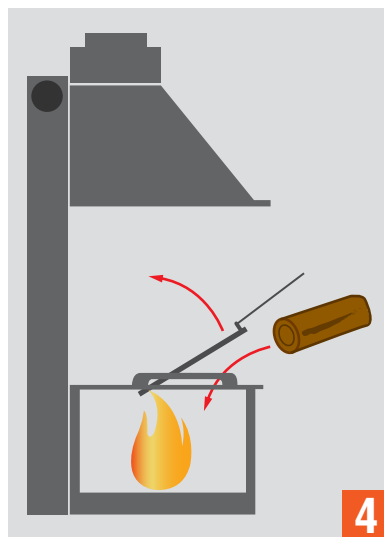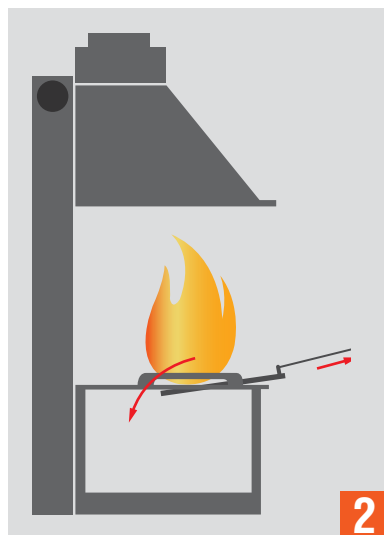

Technical informations



The appliances are equipped with the double combustion system.
 Primary air: supplies the firebox for the combustion of the wood
 Secondary air: ensures the combustion of the gases, controlled with right and left handles



Radial Blower (option)


Dimensions : 250x240x140 mm
 Power supply : 230 v 50hZ
 Consumption : 108 w
 Debit : 280 m3/h
 Revolutions : 1420 rpm
 Connection : Ø125 mm
 Sound level : 45 db
 Probe for automatic activation
 Optional speed variator
 Length of cable : 3.10 m




Access hatch for chimney sweeping.




The appliances are equipped with adjustable feet. The level can be adjusted by nuts to guarantee the stability, and brings a space for the air circulation under the firebox.

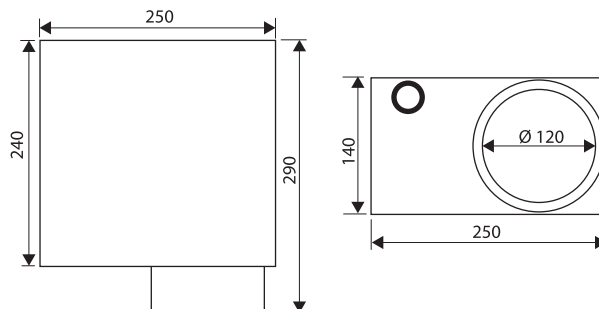


features - dimensions

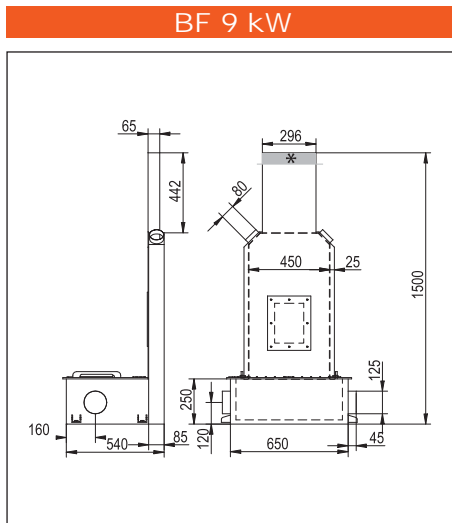


Nominal output : 7 à 9 kW
 Efficiency : >75%
 Firebox volume : 40 liters
 Logs : 50 cm
 Weight : 179 kg
 Autonomy : 5 to 7 h

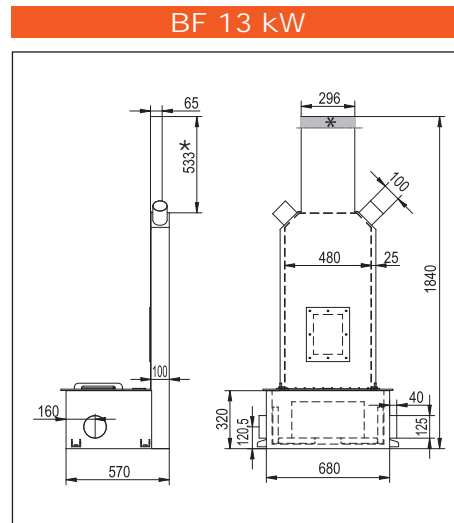

Nominal output : 11 à 13 kW
 Efficiency : >75%
 Firebox volume : 65 liters
 Logs : 55 cm
 Weight : 198 kg
 Autonomy : 7 to 10 h

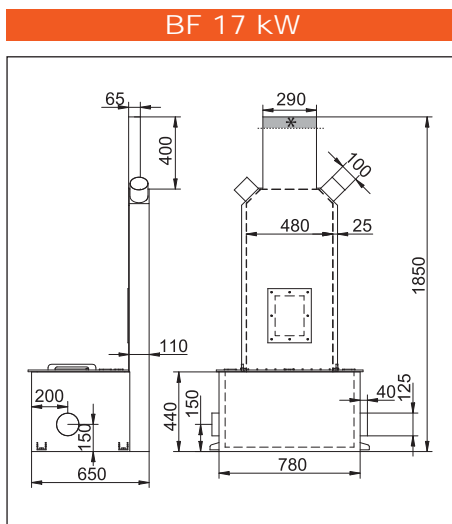


Nominal output : 14 à 17 kW
 Efficiency : >75%
 Firebox volume : 90 liters
 Logs : 64 cm
 Weight : 230 kg
 Autonomy : 8 to 11 h

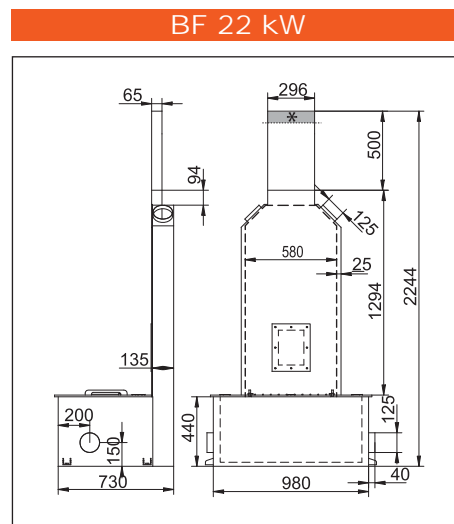


Nominal output : 19 à 22 kW
 Efficiency : >75%
 Firebox volume : 120 liters
 Logs : 75 cm
 Weight : 278 kg
 Autonomy : 10 to 13 h

* Appliance sold separately: the pipe must be cut to be adjusted according to the fireplace height.
 Appliance sold with a fireplace : the pipe is factory-adjusted.


Heat exchanger Ø 280
 BF 9 Kw

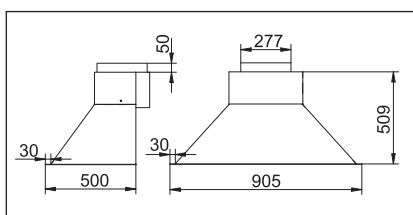

Heat exchanger Ø 280
 BF 13 Kw - 17 Kw

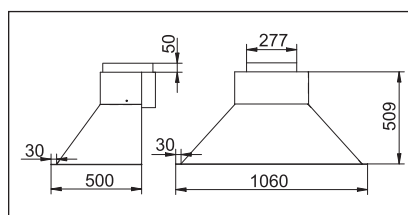



Heat exchanger Ø 280
 BF 22 Kw

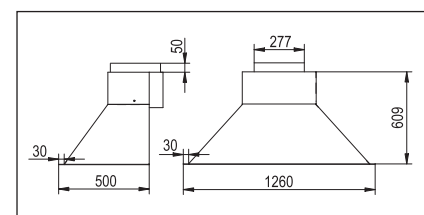

Multichauf

Distribution of the heat into adjoining rooms


"Multichauf" draws and distributes the heat through insulated ducts to warm air grids.

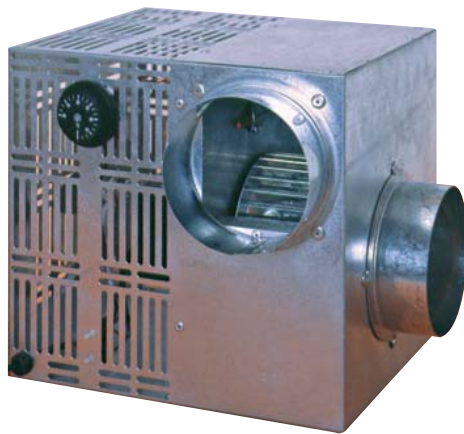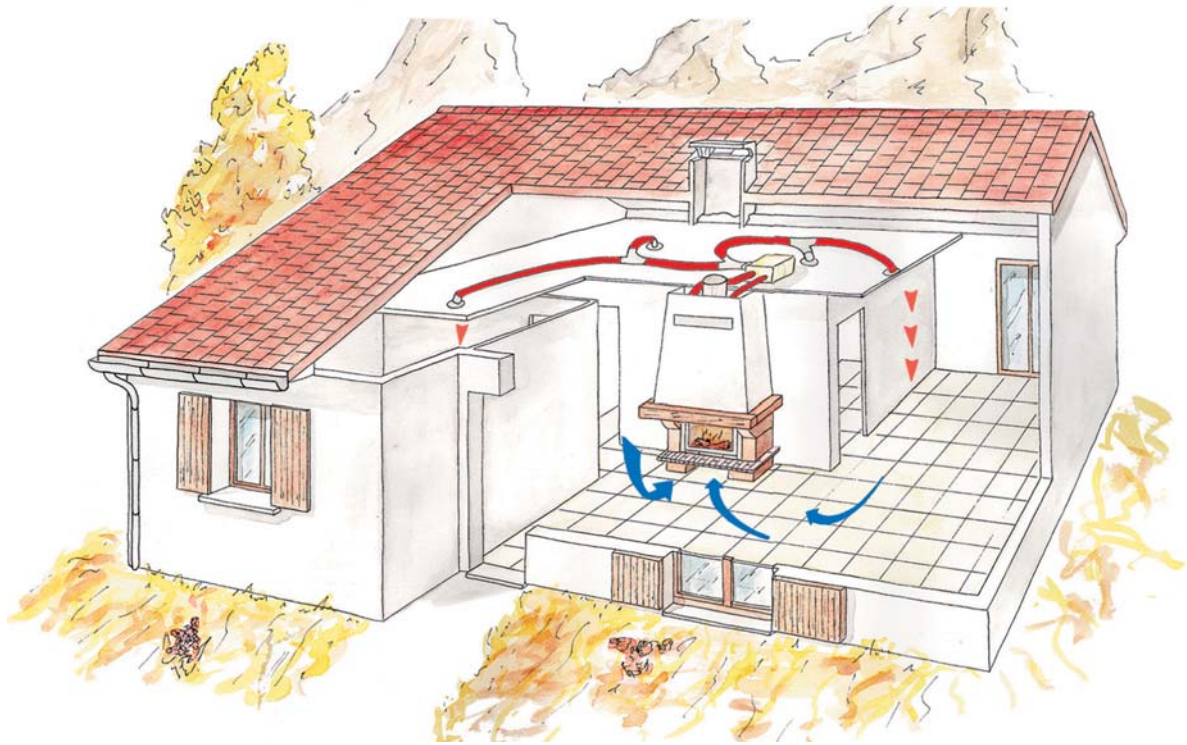

Multichauf Box
2 powers : 400m³/h - 600m³/h



Adjustable warm air grid

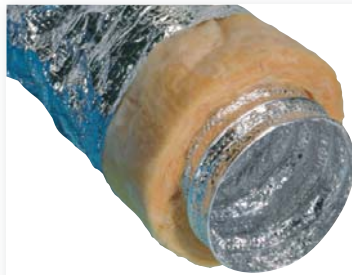

Insulated duct



Y-shape connection



steel fireboxes *Ambiance* range

Tradition and Security are the keywords of the « **Ambiance** » range. Adapted into a fireplace, the fireboxes can function with doors and valves opened, to be in direct contact with the flames and to have a complete view of the fire only. With the door closed, they are real heating appliances.

TRIPLE HEATING ACTIONS:

- Radiation
- Accumulation
- Convection

They heat for several hours after the fire has died, thanks to the inertia of the refractory bricks.

- Steel casing doubled with refractory bricks.
- Automatic opening of the valve at the opening of the door.
- Heat exchanger equipped with a flue collar of Ø 230 to Ø 300, depending the models.
- Retractable door. Some doors are equipped with magnets to avoid vibrations in windy areas.
- Intense black or cast iron grey door, or as option: Façade covered with brass or chromium.

All the “Ambiance” fireboxes have been tested by an agreed laboratory.

Combustible: logs at 15% of humidity.

They all comply with the European norm EN 13229.

“Ambiance PLUS” fireboxes are guaranteed:

Combustion chamber: 10 years

Retractable door mechanism: 5 years

(Except glasses, joints, thermal screens and wearing parts under the conditions noted on the instruction manual delivered with each appliance).



Horizon 71 & 80 cm

code 71 cm : F1200
code 80 cm : F1201

- Automatic opening of the valve at the opening of the door
- Anti-vibrations door slidings

Options :

- Brass door
- Nickel door
- Wood holder
- Adjustable feet
- Grey bricks

Horizon 71 cm

| | |
|--------------------------|-------------|
| Logs | 65 cm |
| Internal dimensions | 71 cm |
| Output | 12 - 17 kW* |
| Efficiency | 73,90% |
| CO emission (% à 13% O2) | 0,19% |
| Weight | 310 kg |

Horizon 80 cm

| | |
|--------------------------|-------------|
| Logs | 75 cm |
| Internal dimensions | 81 cm |
| Output : | 14 - 20 kW* |
| Efficiency : | 72,80% |
| CO emission (% à 13% O2) | 0,18% |
| Weight | 330 kg |

*according to EN 13229 norm



Valve handle on the hood
Delivered with double face models
On demand: possibility to order the valve handle on both sides.




Option ajustable feet
Available on all the range

DOUBLE FACE MODEL

2 retractable doors
(adjustable feet as option)
Code F1205 for 71 cm
Code F1206 for 80 cm

1 retractable door
1 swing-door
Code F1203 for 71 cm
Code F1204 for 80 cm

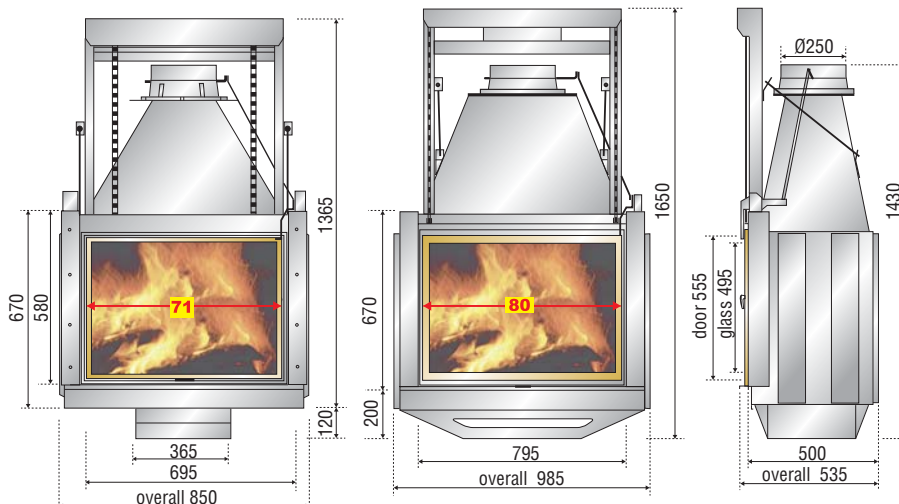

Horizon 100 cm

code : F1211


- Automatic opening of the valve at the opening of the door
- Anti-vibrations door slidings

Options :

- Brass door
- Nickel door
- Wood holder
- Adjustable feet
- Grey bricks

| | |
|--------------------------|-------------|
| Logs | 100 cm |
| Internal dimensions | 102 cm |
| Output | 19 - 27 kW* |
| Efficiency | 70,20% |
| CO emission (% à 13% O2) | 0,17% |
| Weight | 480 kg |



*according to EN 13229 norm

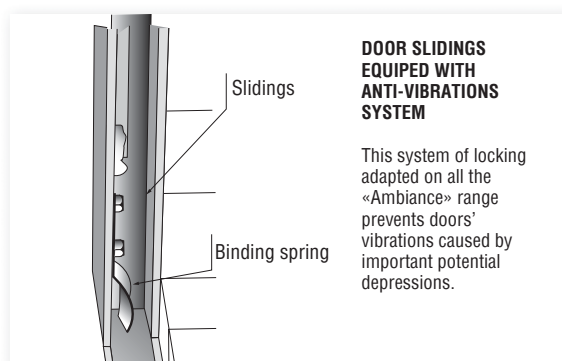

When the door of the firebox is lifted; the fireplace becomes a traditional open fire.



Automatic opening of the valve at the opening of the door

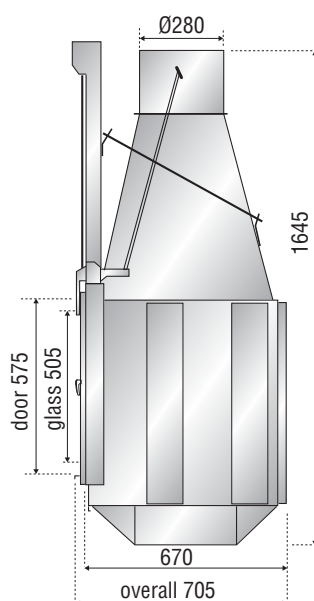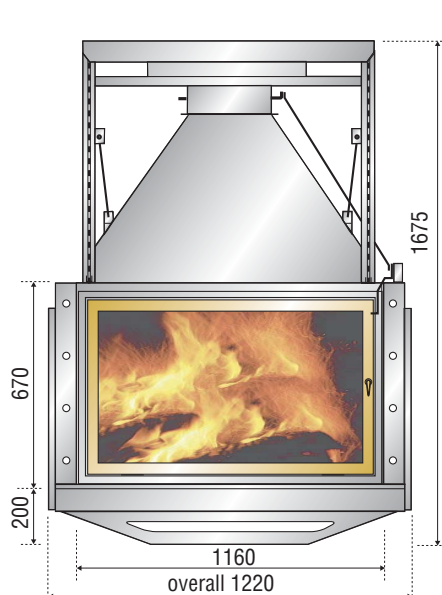

Horizon 80 cm curved door

code : F1209

- Automatic opening of the valve at the opening of the door
- Anti-vibrations door slidings

Options :


- Brass door
- Nickel door
- Wood holder
- Adjustable feet
- Grey bricks

| | |
|---------------------------------------|-------------|
| Logs | 80 cm |
| Internal dimensions | 81 cm |
| Output | 14 - 20 kW* |
| Efficiency | 72,80% |
| CO emission (% à 13% O ₂) | 0,18% |
| Weight | 350 kg |

*according to EN 13229 norm




In order to better concentrate and direct the volume of the heated air, a convector (double envelop) is available as option. (For all the range except "Meteor"). Adapted casings for the distribution of this warm air where it is necessary. Delivered with :
 - 2 caps
 - 2 sleeves Ø 125

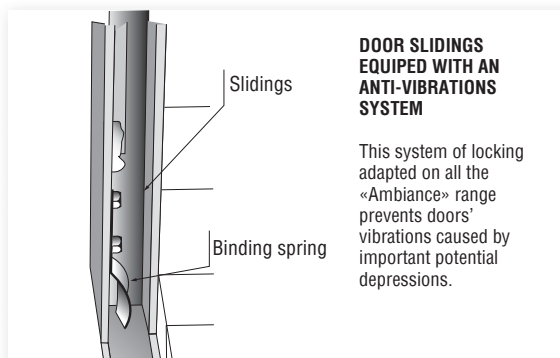

DOOR SLIDINGS EQUIPPED WITH AN ANTI-VIBRATIONS SYSTEM

This system of locking adapted on all the «Ambiance» range prevents doors' vibrations caused by important potential depressions.

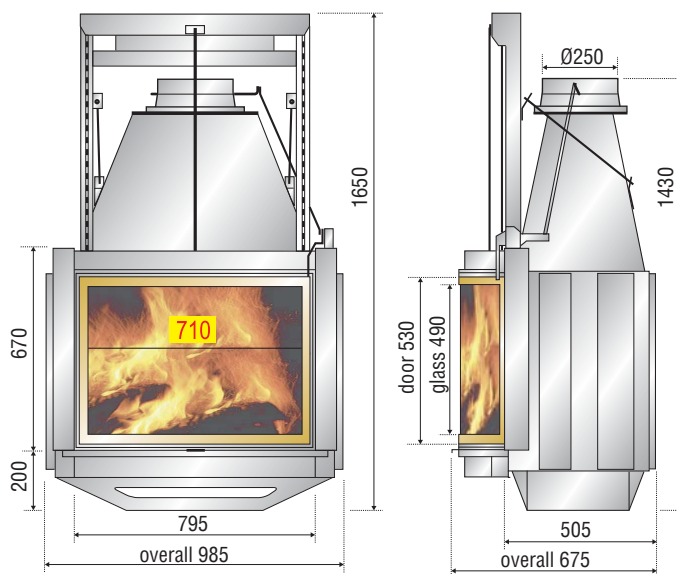

Integrated door hinges

Meteor flat door

code : F1208




- Automatic opening of the valve at the opening of the door
- Anti-vibrations door slidings

Options :

- Brass door
- Nickel door
- Wood holder
- Adjustable feet
- Grey bricks

| | |
|---------------------------------------|-------------|
| Logs | 52 cm |
| Internal dimensions | 55 cm |
| Output | 13 - 18 kW* |
| Efficiency | 73,50% |
| CO emission (% à 13% O ₂) | 0,19% |
| Weight | 300 kg |

*according to EN 13229 norm

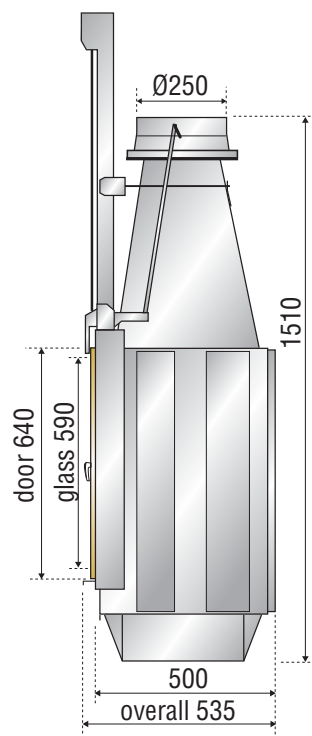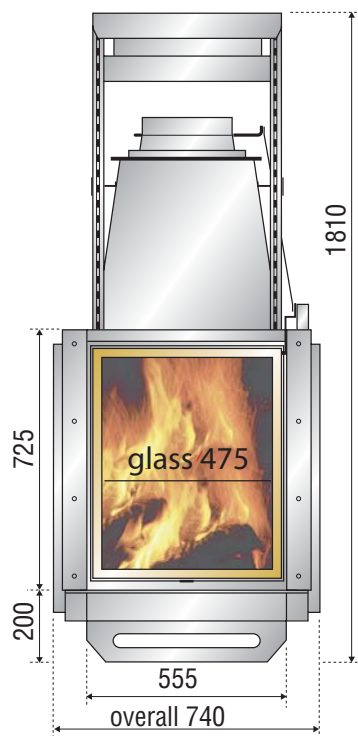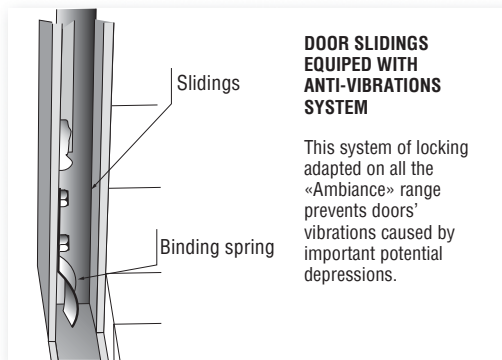



steel fireboxes

Steel fireboxes



Tradition and Security are the keywords of the « **Ambiance Plus** » range. Adapted into a fireplace, the fireboxes can function with doors and valves opened, to be in direct contact with the flames and to have a complete view of the fire only. With the door closed, they are real heating appliances.

TRIPLE HEATING ACTIONS:

- Radiation
- Accumulation
- Convection

They heat for several hours after the fire has died, thanks to the inertia of the refractory bricks.

- Steel casing doubled with refractory bricks.
- Automatic opening of the valve at the opening of the door.
- Heat exchanger equipped with a flue collar of Ø 230 to Ø 300, depending the models.
- Retractable door. Some doors are equipped with magnets to avoid vibrations in windy areas.
- Intense black or cast iron grey door, or as option: Façade covered with brass or chromium.

All the “Ambiance PLUS” fireboxes have been tested by an agreed laboratory. Combustible: logs at 15% of humidity.

They all comply with the European norm EN 13229. “Ambiance PLUS” fireboxes are guaranteed: Combustion chamber: 10 years

Retractable door mechanism: 5 years

(Except glasses, joints, thermal screens and wearing parts under the conditions noted on the instruction manual delivered with each appliance).


The post combustion



All “Ambiance PLUS” fireboxes

are equipped with post combustion.

The principle consists in injecting oxygen at a certain height of the combustion chamber in order to provoke the combustion of the gases before their release in the atmosphere.

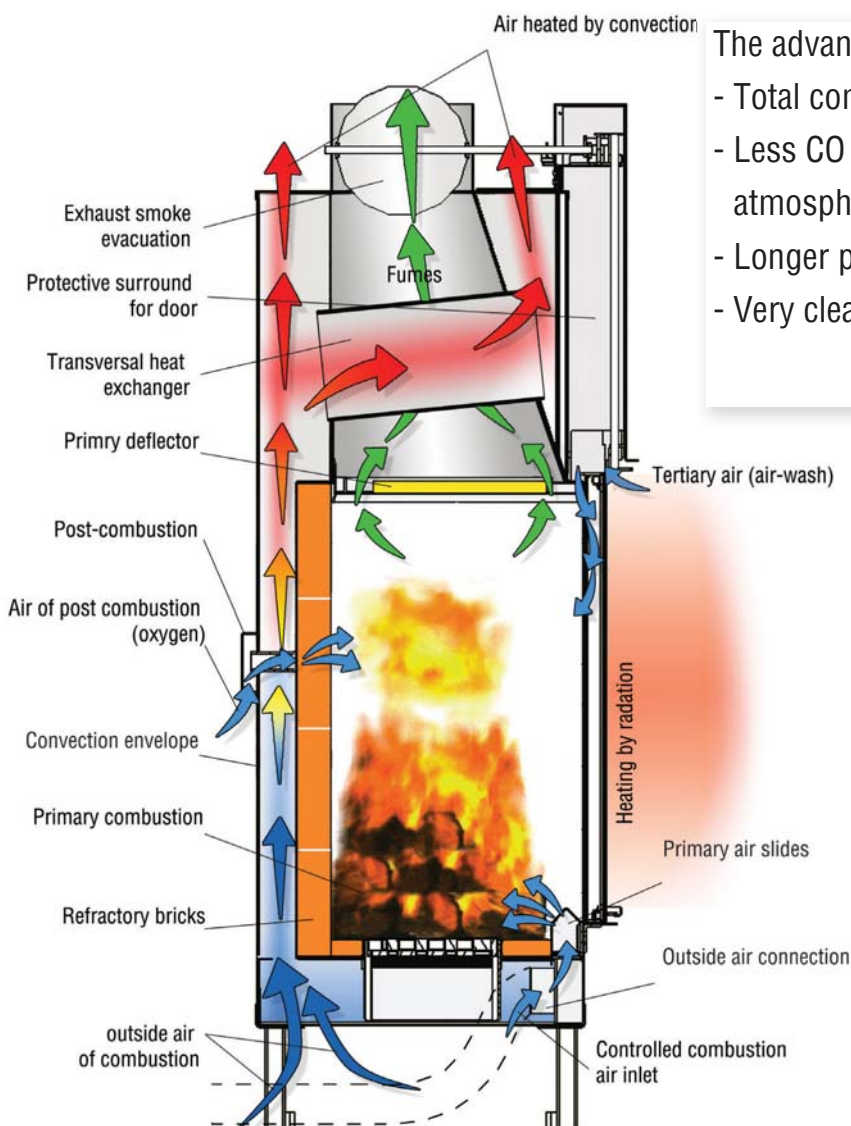

The advantages are the following:


- Total combustion: 0% of losses.
- Less CO and CO2 emissions in the atmosphere.
- Longer period of the fire
- Very clean glasses and bricks

Triple walled fireboxes


- Refractory for heat conservation (EN ISO 9002)
- Firebox for heat exchange (EN 10111)
- Convection lining for heat transmission (EN 10025)

OUTSIDE AIR INTAKES

Outside air connection for combustion air and post combustion air

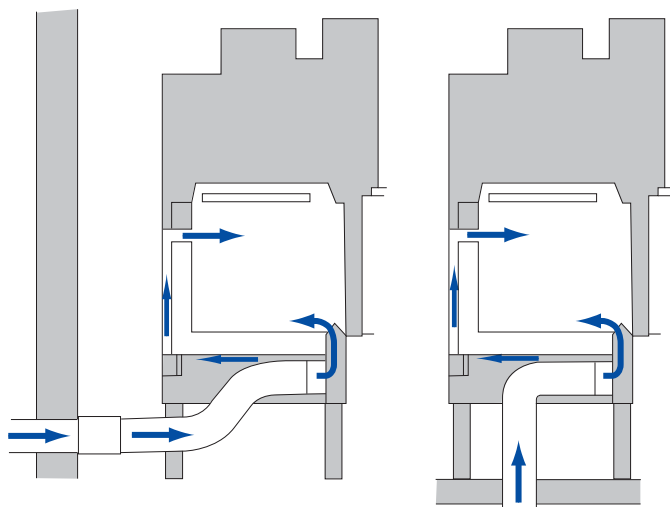


Direct outside air connection (on simple face fireboxes) and post-combustion (on F 800 H, F 800 I, Insert I 700)

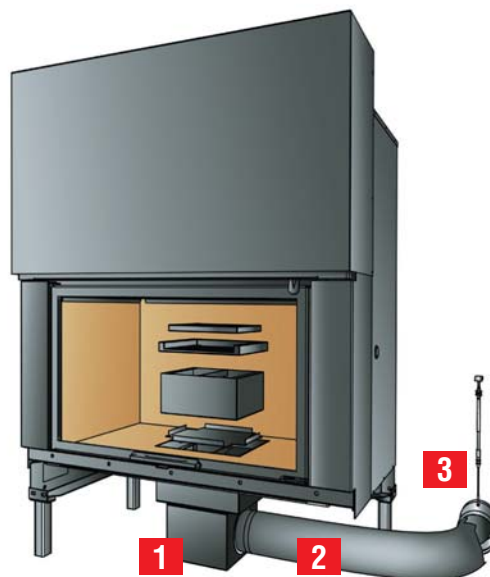

Option :


Outside air connection with adjustable box on the whole range (for fireboxes not equipped with direct connection) (complete kit : 1 box - 2 duct - 3 valve)

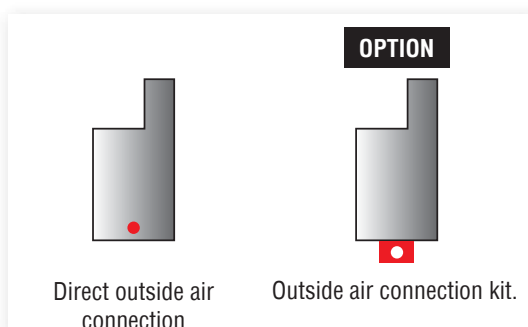


Blower with directed flow

To accelerate the convection inside the carter


Dim : 250x240x140 mm
 Power : 230v 50Hz
 Consumption : 108 W
 Debit : 280m³/h
 RPM : 1420
 Connection: Ø 125 mm
 Sound level: 45dB
 Probe for automatic activation.
 Infra-red remote control



Blower



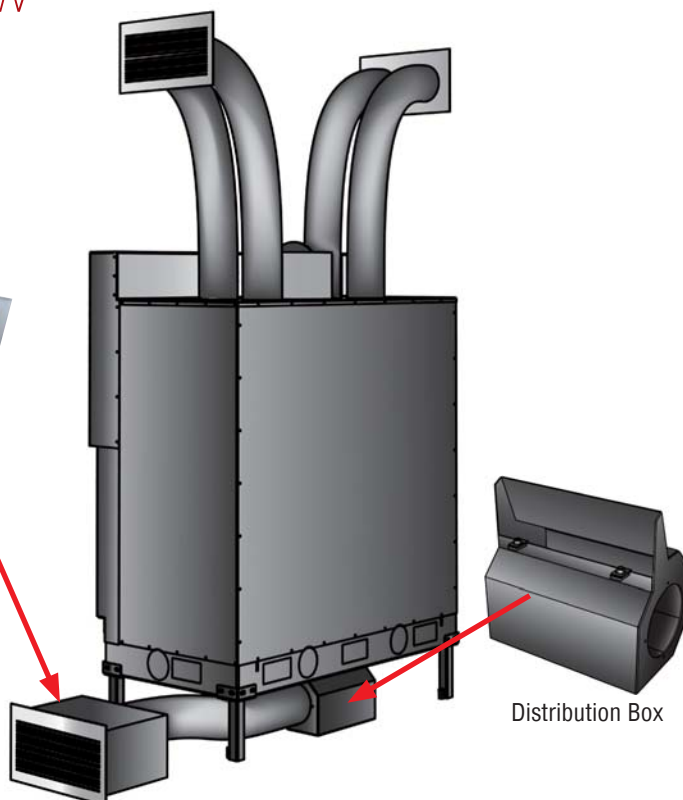


Distribution Box

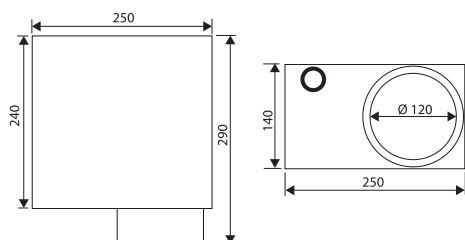


RELIABLE ECOLOGICAL HEATING

Emission of particles
16 mg/Nm³
 (test results: firebox csd VL 900 - 13 Kw - source TD
 4095 - CTIF)

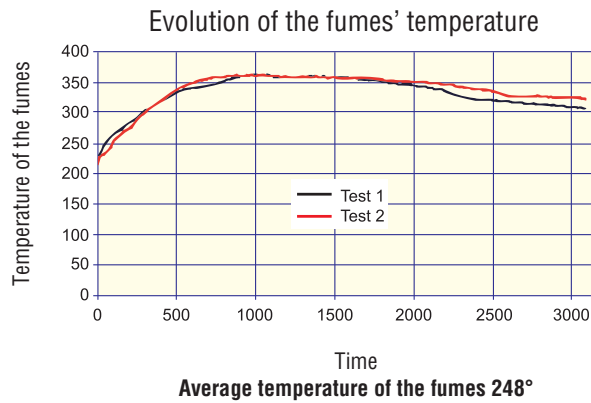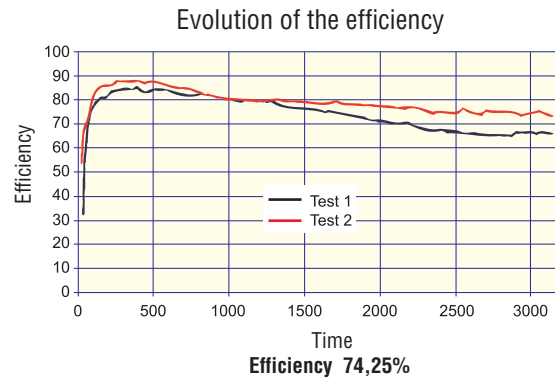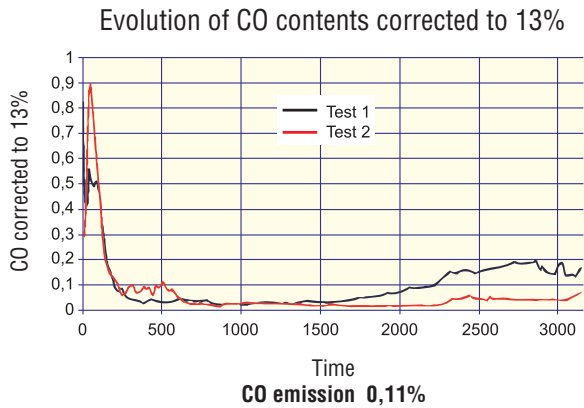

Time of the heat release equal to the time of the temperature rising

*Details and conditions noted on the guarantee certificate delivered with each appliance or on demand.

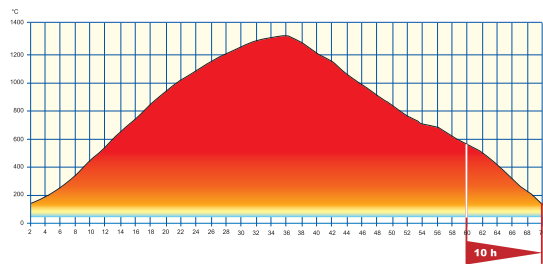

COMBUSTION CHAMBER
10 YEARS* GUARANTEE

REFRACTORY BRICKS

HIGH RESISTANCE (1350°C)

By their conception, they ensure:

Accumulation, transmission, and release of the heat continuously and over a period superior to the time of the fire (ISO 9002)



Design bricks



Traditional bricks



Grey bricks
(option)

From January 2014

TECHNICAL FEATURES

SECURITY - SILENCE - RELIABILITY

Sliding system

equipped with aluminium rollers and high temperature bearings



Door lifting guide

equipped with high temperature bearings



Feet of the hearth

adjustable feet to ensure the stability of the hearth.



Base


allows the hearth to be placed directly on the floor. It includes convection air intake vents which can be tilted or removed.

Door base

The technical design of the door base allows harmonisation with the stone under the door base without joint.



UPPER DOOR LOCKER

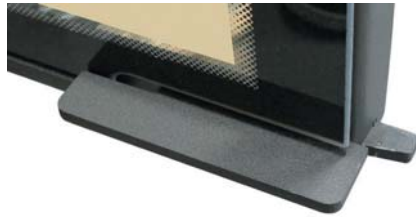

LOWER DOOR LOCKER



Combustion Air slides control

**From January 2014
Lowered bricked base**



Insert I 700



code : I 700 I

Options :

- Grey bricks
- Ventilation

| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 6 - 9 kW |
| Efficiency | 81,30% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 150 kg |




- Draw control valve
- Convection lining
- Outside air connection Ø 60
- Combustion air slide
- Door locking by compression
- Airtight door with stainless steel joint
- Automatic door locking when the valve is closed
- Infrared glass
- Ashray with ignition starter



CM 4 - width : 45 mm
Code : CM4 I700



CM 3 - width : 45 mm
Code : CM3 I700

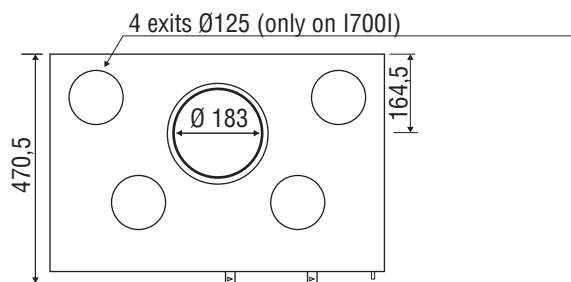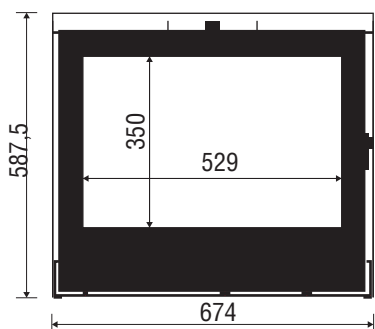

F800H

code : F800H



16/9^e



Exit Ø 180



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Double safety locking
- Combustion speed control
- 1 air intake Ø 80

Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 6 - 9 kW |
| Efficiency | 81,3% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 250 kg |

F800I

code : F800I



Exit Ø 180




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Double safety locking
- Combustion speed control
- 1 air intake Ø 80


Options :

- Grey bricks
- Screen-printed WS Black glass
- Blower

| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 6 - 9 kW |
| Efficiency | 81,3% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 260 kg |

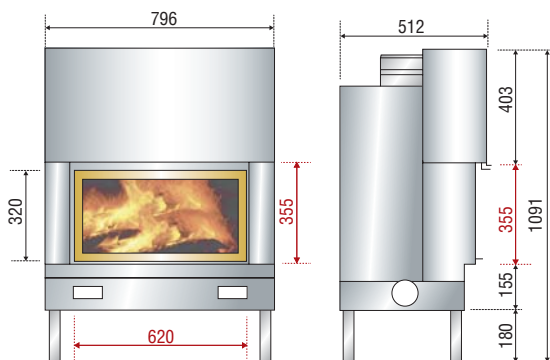

dim fireplaces

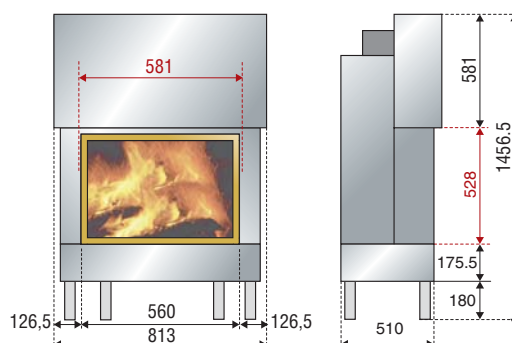

dim. fireplaces

F1000

code : F1000



Exit Ø 250



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Double safety locking
- Combustion speed control
- 1 air intake Ø 80

Options :

- Grey bricks
- Blower

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 325 kg |

F1000H

code : F 1000 H



16/9^e

OPTION
**WS
Black**

Exit Ø 250




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Double safety locking
- Combustion speed control
- 1 air intake Ø 80


Options :

- Grey bricks
- Screen-printed WS Black glass
- Blower

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 300 kg |

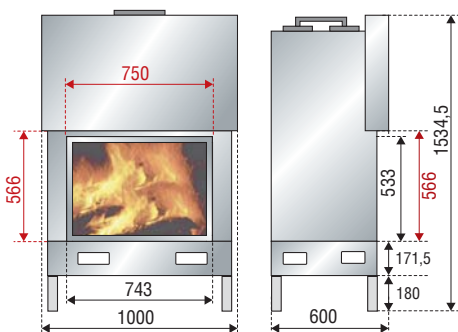

dim. fireplaces

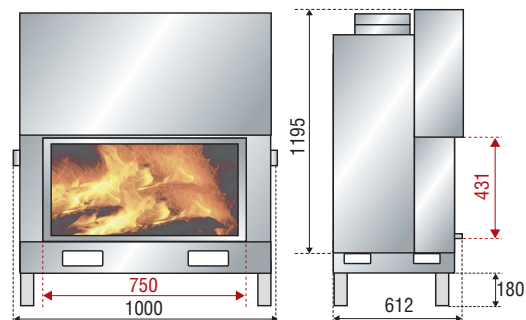

dim. fireplaces

F1200

code : F1200



Exit Ø 280



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 2 air intakes Ø 80

Options :

- Grey bricks
- Blower

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 450 kg |

F1200H

code : F1200H



16/9^e

OPTION
**WS
Black**

Exit Ø 250




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 2 air intakes Ø 80


Options :

- Grey bricks
- Screen-printed WS Black glass
- Blower

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 400 kg |

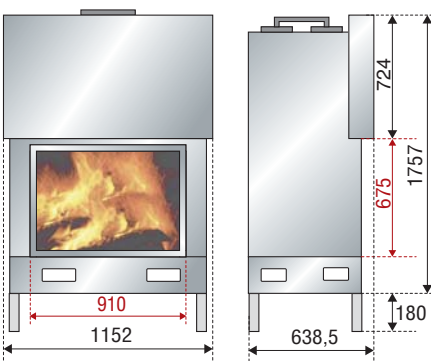

dim. fireplaces

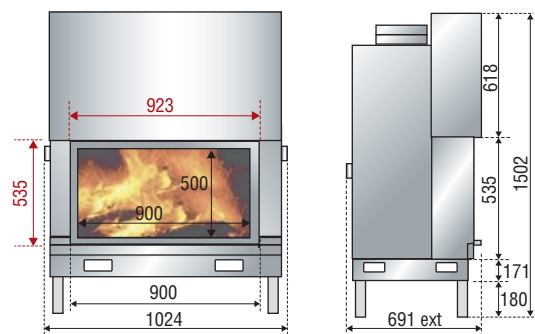

dim. fireplaces

F1400

code : F1400



Exit Ø 300



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 2 air intakes Ø 80

Options :

- Grey bricks
- Blower

| | |
|------------------|------------|
| Logs | 100 cm |
| Output | 13 - 19 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 700 kg |

F1400H

code : F1400H



16/9^e

OPTION
**WS
Black**

Exit Ø 300





- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 2 air intakes Ø 80

Options :

- Grey bricks
- Screen-printed WS Black glass
- Blower

| | |
|------------------|------------|
| Logs | 100 cm |
| Output | 13 - 19 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 680 kg |

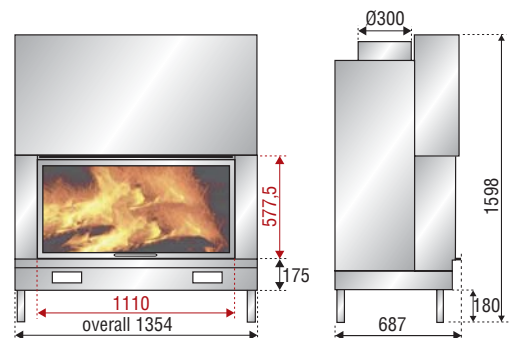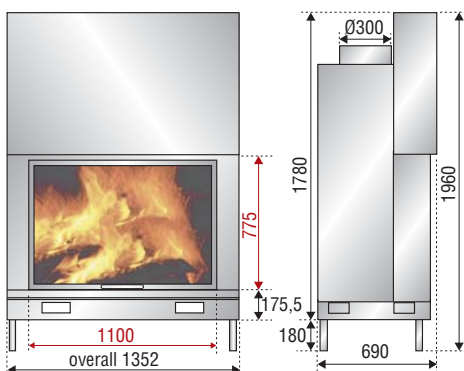

dim. fireplaces

dim. fireplaces

F1600

code : F1600



Exit Ø 300



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- 2 primary air intakes Ø 80
- Combustion speed control
- Double safety locking
- Removable feet
- Fire basket

Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|-----------|
| Logs | 120 cm |
| Output | 13- 19 kW |
| Efficiency | 72,3% |
| CO | 0,11% |
| 6 warm air exits | Ø 125 |
| Weight | 550 kg |

F1600H

code : F1600H



22/9e



Exit Ø 300




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- 2 primary air intakes Ø 80
- Combustion speed control
- Double safety locking
- Removable feet
- Fire basket


Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|------------|
| Logs | 120 cm |
| Output | 13 - 19 kW |
| Efficiency | 72,3% |
| CO | 0,11% |
| 6 warm air exits | Ø 125 |
| Weight | 480 kg |

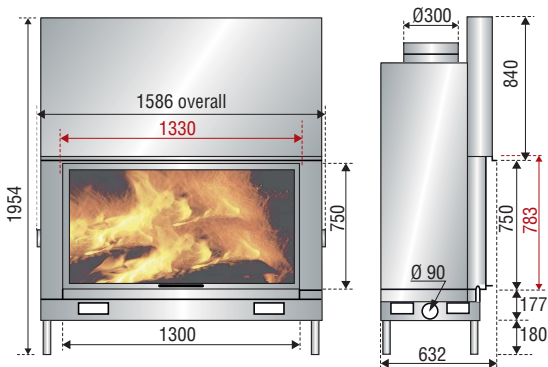

dim. fireplaces

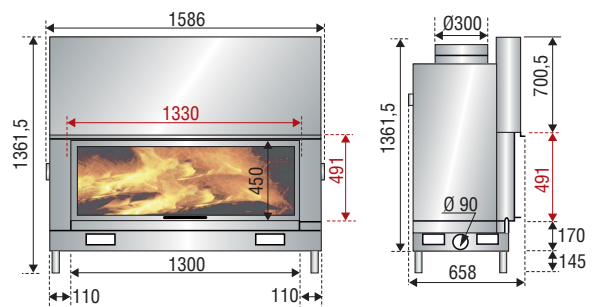

dim. fireplaces

F1600H XXL

code : F1600H XXL



22/9e



Exit Ø 300



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- 2 primary air intakes Ø100
- Combustion speed control
- Hinged door opening
- 2 upper door lockers
- Removable feet
- Fire basket


Options :

- Grey bricks
- Screen-printed WS Black glass

Hinged door opening



| | |
|------------------|-----------|
| Logs | 160 cm |
| Output | 13- 19 kW |
| Efficiency | 72,3% |
| CO | 0,11% |
| 6 warm air exits | Ø 125 |
| Weight | 550 kg |

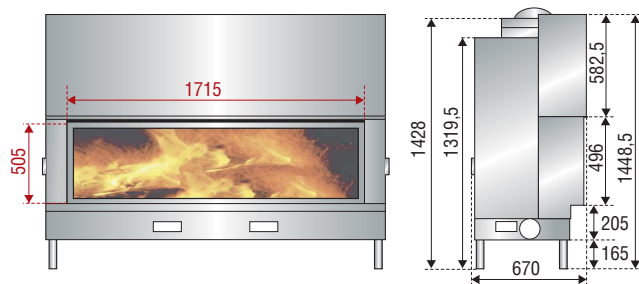

VLG900

code : VLG900



Exit Ø 250



VLD900

code : VLD900



Exit Ø 250



- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Bended glass
- Bended glass WS BLACK
- Kit for outside air connection
- Blower


| | |
|------------------|-----------|
| Logs | 70 cm |
| Output | 9 - 13 kW |
| Efficiency | 74,25% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 330 kg |

- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket


Options :

- Grey bricks
- Bended glass
- Bended glass WS BLACK
- Kit for outside air connection
- Blower

| | |
|------------------|-----------|
| Logs | 70 cm |
| Output | 9 - 13 kW |
| Efficiency | 74,25% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 330 kg |

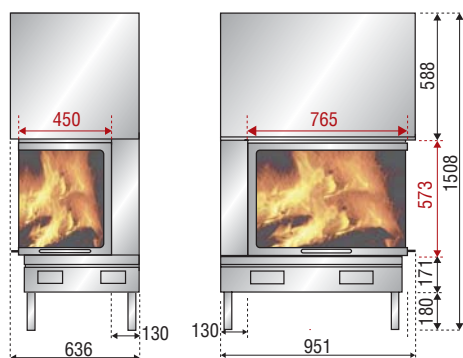

Bended glass

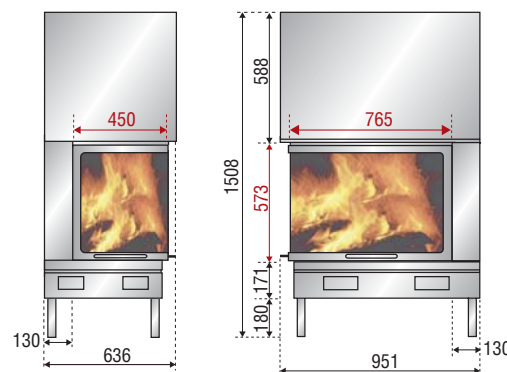

scheme : VLG 900 bended glass
For the glass in 2 parts, contact us for dimensions

dim. fireplaces

scheme : VLG 900 bended glass
For the glass in 2 parts, contact us for dimensions

F1200HVLG

code : F 1200 VLG



16/9e

Exit Ø 250



- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Bended glass- F1200HVLGVP
- Kit for outside air connection
- Blower

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 400 kg |

F1200HVLD

code : F 1200 VLD



16/9e

Exit Ø 250



- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Bended glass- F1200HVLDVP
- Bended glass WS BLACK
- Kit for outside air connection
- Blower

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 400 kg |



scheme : F 1200H VLG Bended glass
For the glass in 2 parts, contact us for dimensions

dim. fireplaces

Scheme: F 1200H VLD Bended glass
For the glass in 2 parts, contact us for dimensions

F3V900

code : F3V900



Exit Ø 250



- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|-----------|
| Logs | 75 cm |
| Output | 9 - 13 kW |
| Efficiency | 74,25% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 320 kg |

F1200H3V

code : FH12003V



16/9e

Exit Ø 250





- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 400 kg |

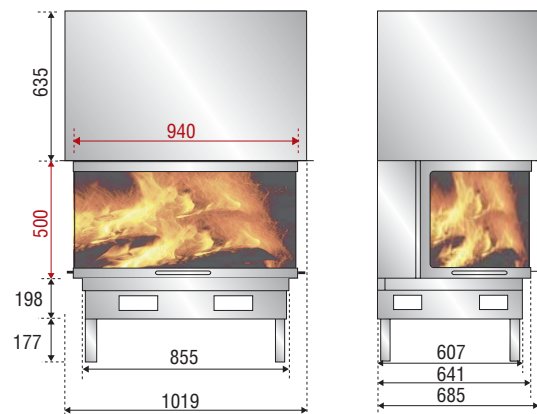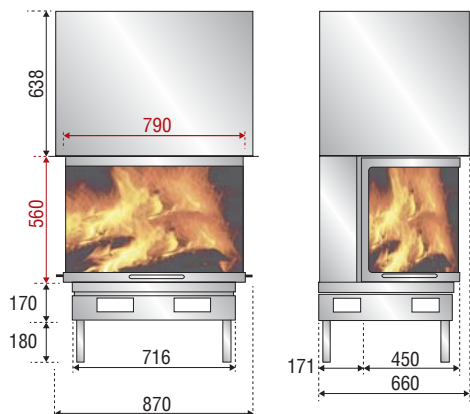

dim. fireplaces

DF1000

Code : DF1000



16/9e

Exit Ø 250




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet - Fire basket
- Double safety locking
- Combustion speed control
- 2 air intakes Ø 80

Options :

- Grey bricks

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 330 kg |

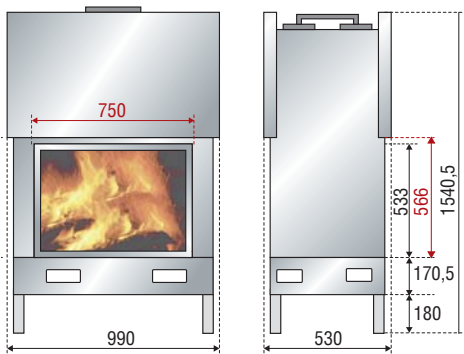

dim. fireplaces

DF1000H

code : DF1000 H



16/9e

OPTION
WS
Black

Exit Ø 250




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet - Fire basket
- Double safety locking
- Combustion speed control
- 2 air intakes Ø 80

Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 295 kg |

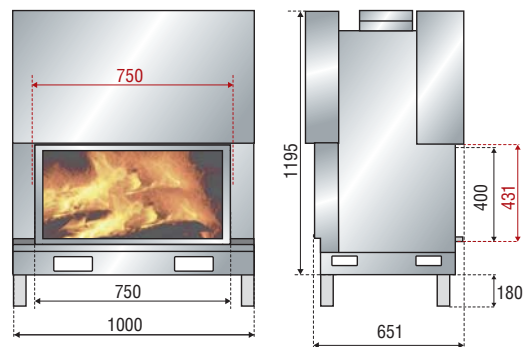

dim. fireplaces

DF1200H

code : DF1200 H



16/9e



Exit Ø 250



- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 4 air intakes Ø 80

Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|------------|
| Logs | 90 cm |
| Output | 12 - 17 kW |
| Efficiency | 72,30% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 400 kg |

DF1600H

Code : DF1600H



16/9e



Exit Ø 300




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket
- Combustion speed control
- Double safety locking
- 4 air intakes Ø 80


Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|------------|
| Logs | 120 cm |
| Output | 13 - 19 kW |
| Efficiency | 73,10% |
| CO | 0,22% |
| 4 warm air exits | Ø 125 |
| Weight | 470 kg |

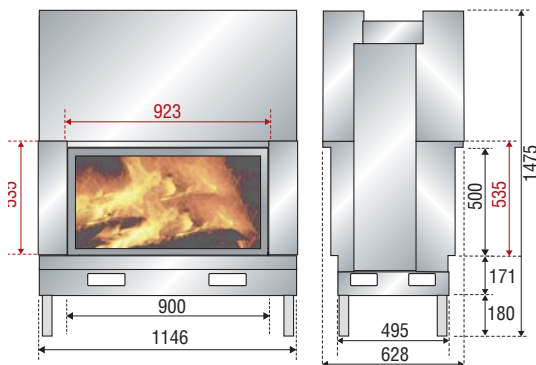

dim. fireplaces

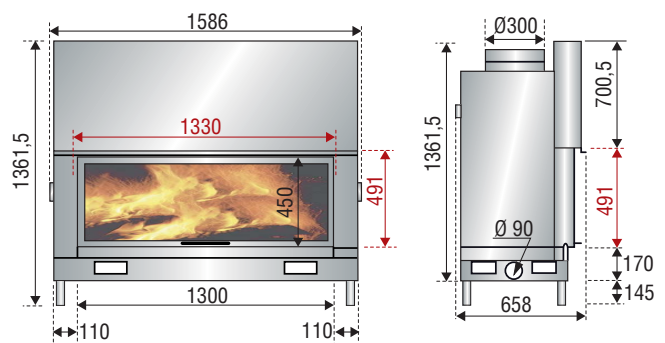

dim. fireplaces

DF1600H XXL

Code : DF1600H

OPTION
**WS
Black**

**POST
COMBUSTION**

22/9^a




- Secure door unlocking after the opening of the valve
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- 4 primary air intakes Ø100
- Combustion speed control
- Hinged door opening
- 2 upper door lockers
- Removable feet
- Fire basket

Options :

- Grey bricks
- Screen-printed WS Black glass

| | |
|------------------|-----------|
| Logs | 160 cm |
| Output | 13- 19 kW |
| Efficiency | 72,3% |
| CO | 0,11% |
| 6 warm air exits | Ø 125 |
| Weight | 550 kg |

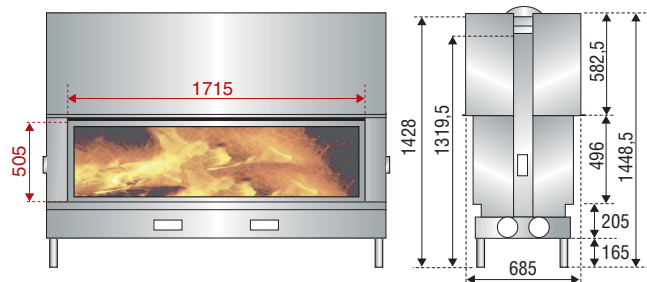

EPI950

code : EPI 950

**POST
COMBUSTION**

Exit Ø 280




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|-----------|
| Logs: | 75 cm |
| Output : | 7 - 10 kW |
| Efficiency : | 71,30% |
| CO : | 0,14% |
| 4 warm air exits | Ø 125 |
| Weight : | 350 kg |

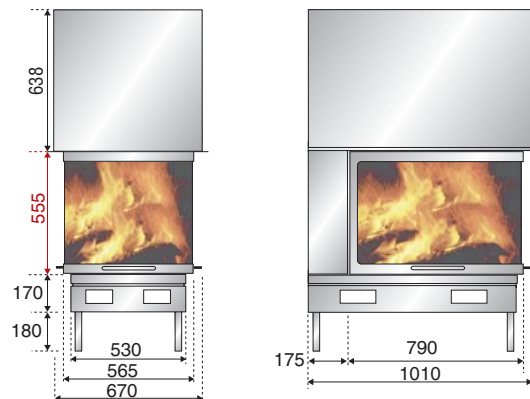

dim. fireplaces

dim. fireplaces

R180

code : R180



Exit Ø 250




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket



Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|-----------|
| Logs | 75 cm |
| Output | 7 - 10 kW |
| Efficiency | 61% |
| CO | 0,08% |
| 4 warm air exits | Ø 125 |
| Weight | 285 kg |

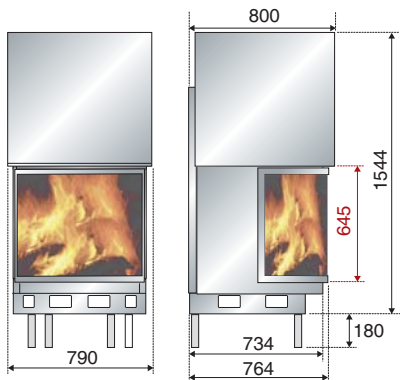

dim. fireplaces

F800B

code : F800B



Exit Ø 200




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection
- Blower

| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 7 - 9 kW |
| Efficiency | 81,3% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 260 kg |

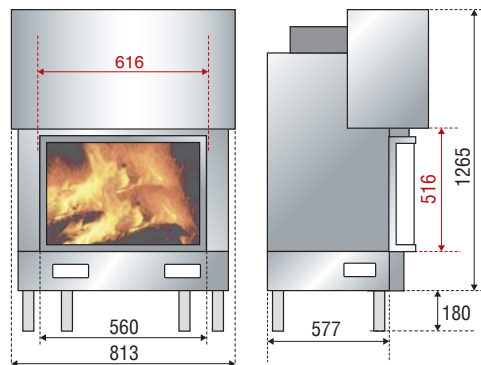

dim. fireplaces

Z800I

code : Z800I



Exit Ø 230

OPTION
**WS
Black**



Z800B

code : Z800B



Exit Ø 230



- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Screen-printed WS Black glass
- Kit for outside air connection
- Blower



| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 7 - 9 kW |
| Efficiency | 81,3% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 350 kg |

- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection
- Blower

| | |
|------------------|----------|
| Logs | 50 cm |
| Output | 7 - 9 kW |
| Efficiency | 81,3% |
| CO | 0,17% |
| 4 warm air exits | Ø 125 |
| Weight | 350 kg |

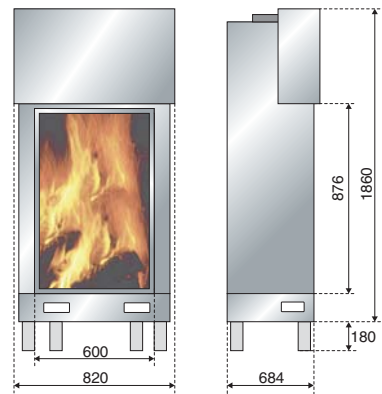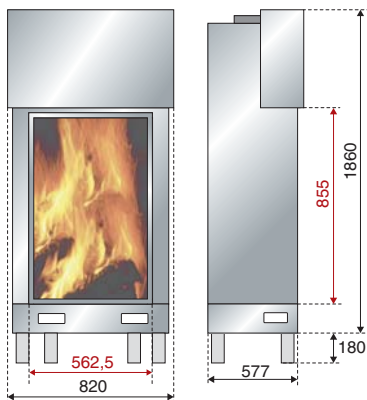

dim. fireplaces

B900

code : B900



Exit Ø 230




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|-----------|
| Logs | 50 cm |
| Output | 9 - 13 kW |
| Efficiency | 74,25% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 260 kg |

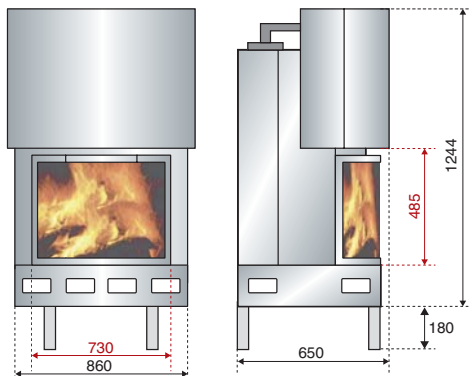

dim. fireplaces

B1100

code : B1100



Exit Ø 250




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 330 kg |

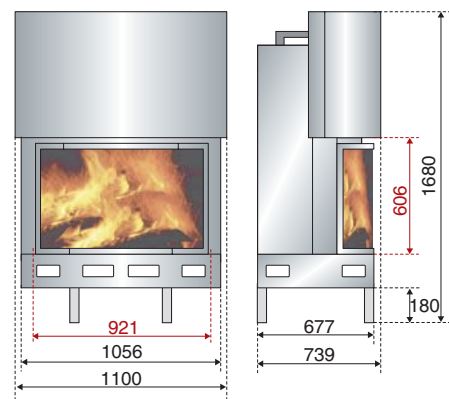

dim. fireplaces

P900

code : P900



Exit Ø 230




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|-----------|
| Logs | 55 cm |
| Output | 9 - 13 kW |
| Efficiency | 74,25% |
| CO | 0,11% |
| 4 warm air exits | Ø 125 |
| Weight | 250 kg |

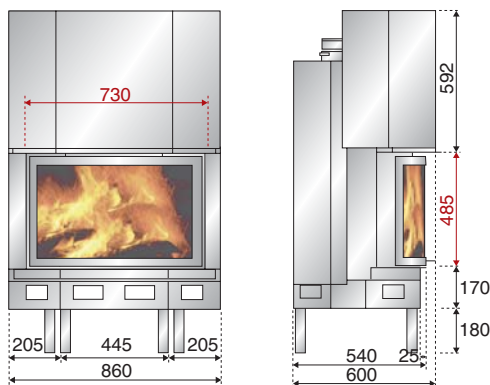

dim. fireplaces

P1100

code : P1100



Exit Ø 250




- Automatic opening of the valve at the opening of the door
- Protective surround for the door
- Convection lining
- Moveable and detachable air inlets
- Removable feet
- Fire basket

Options :

- Grey bricks
- Kit for outside air connection

| | |
|------------------|--------------|
| Logs | 75 cm |
| Output | 10,5 - 15 kW |
| Efficiency | 72% |
| CO | 0,05% |
| 4 warm air exits | Ø 125 |
| Weight | 330 kg |

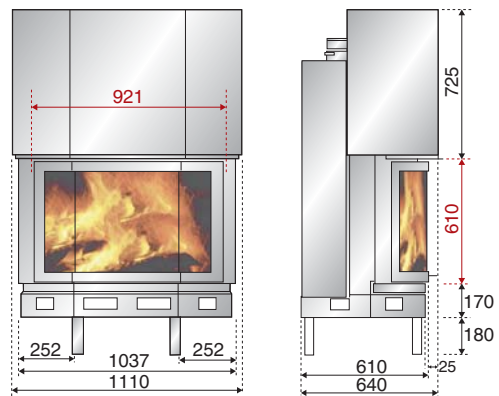

dim. fireplaces

METALLIC FRAMES XL

Stainless steel or black sub-frame.



Lacquered Ivory frame - RAL 1013



Lacquered Chocolate frame- RAL 8017



Lacquered Black frame - RAL 9005



| FIREBOX | DIMENSIONS | FIREBOX | DIMENSIONS |
|----------|------------|---------|------------|
| F 800 H | 830 X 555 | Z 800 I | 790 X 1057 |
| F 1000 H | 980 X 620 | F 1000 | 982 X 753 |
| H 1200 | 1130 X 721 | F 1200 | 1120 X 874 |
| F 1400 | 1325 X 975 | H 1400 | 1320 X 770 |
| F 1600 | 1540 X 985 | H 1600 | 1538 X 683 |

EMBEDDED FRAMES

Delivered welded on fireboxes.
Adjustable on the whole range
(except F 800 B - Z 800 B - B 900 - B 1100 - R 180)

finishings



METALLIC FRAMES

Installation with clip. No tools needed



F 1200 H Metallic frames with 4 sides



F 1200 H Metallic frames with 3 sides


Available with : F800H - F1000H - DF1000H - F1200H - DF1200H - F1400H - H1600 - DFH1600
F1000 - DF1000 - F1200 - Z800I - F1400 - F800I - P900 - P1100

finishings

Black



Rusty



Available with:
VLD900 - VLG900 - F 1200HVLD
F1200HVLG



P 900 + Black metallic frame

Available with
P900 - P1100



F 1200 H + Rusty steel frame - KENNY

Available with
F1200H - F1400H - F1000H
DF1000H - Z800I

Kara frame



finishings



Brushed stainless steel

Layla frames



Layla 3 - frame width 3 cm



Layla 10 - frame width 10 cm

finition



Black

Notes

A series of horizontal dotted lines for writing notes.

Enter the world of Seguin !



Ideal to guide you towards the best choice for your fireplace , cooker, wood stove or pellet stove, Seguin iPhone/Android application can be downloaded free of charge on Apple Store and GooglePlay (key words : cheminée or Seguin).

Simple and practical , the optimized version is available on Smartphones and tablets under iOS and Android.

Features :

- **Collection** : discover and find our products : fireplaces, stoves and cookers.
- **Simulation** : virtually try one of our appliance at your home thanks to the augmented reality. Choose a model, take a picture, adjust, save, and share.
- **Location** : Find your nearest store , find the contact information, locate it on a map and calculate the route.
- **Information** : receive information, an appointment, a quote , whenever you want, wherever you are .
- **Bonus** : make some time for relaxation setting by the fireside, equipped with a double combustion firebox, watching the video sequence as a bonus.

Experience Seguin Generation...

Keep in close touch with Seguin on Facebook :

Groupe Seguin Duteriez



www.google.com/+seguintuteriez



IMPORTANT RECOMMENDATIONS

The fireboxes give off a large amount of heat. The installation should be carried out in accordance with good professional practice particularly as regards insulation and the distances to be observed during the assembly relatively to inflammable materials. The liability of the manufacturer is limited to the specific guarantee on the various supplied parts making up the fireboxes. There is good reason to comply with our recommendations delivered with each appliance. The fireboxes comply with the European norm EN 13229.

Document not contractual. There might be variations of shades due to the photos and the printing. In order to improve its products, the manufacturer is entitled to bring any necessary modifications.

DTP by Seguin.



SEGUIN 
GROUP

Z.I. de Lhérat - 63310 Randan - France

+33 (0)4 70 56 16 00

www.seguin.fr